



Overview

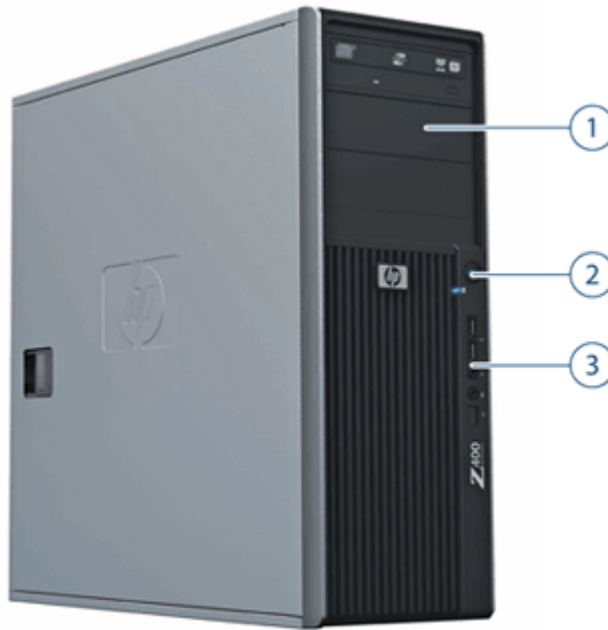

1. 3 External 5.25" Bays
 2. Power Button
 3. Front I/O: 2 USB 2.0, 1 IEEE 1394a, Headphone, Microphone
-

Overview

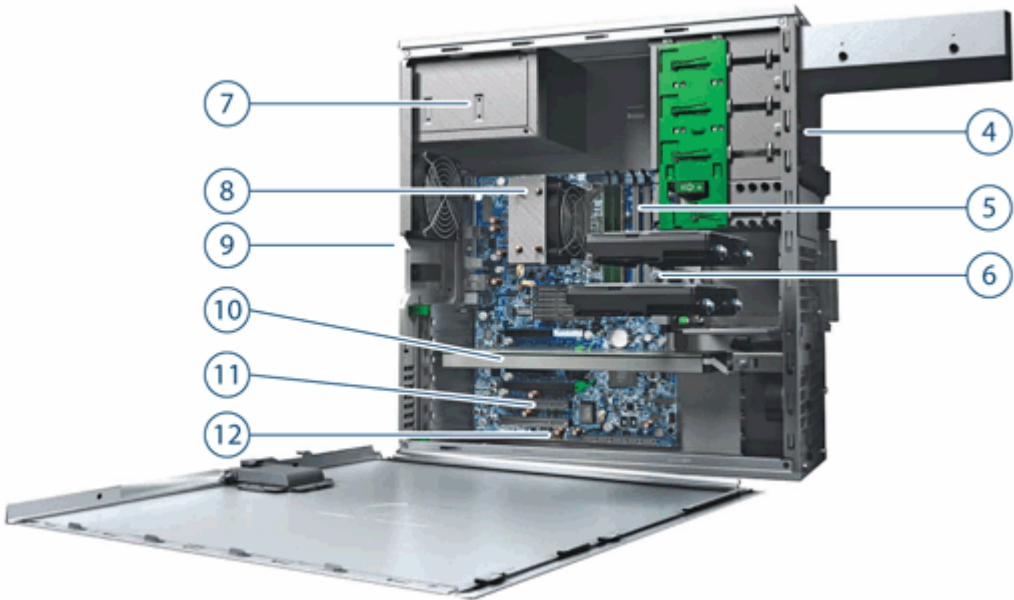

4.

3 External 5.25" Bays
5.

4-DIMM slots/ 6-DIMM slots (depending on base unit model) for DDR3 ECC memory
6.

2 Internal 3.5" Bays
7.

475W, 85% efficient Power Supply
8.

Dual/Quad/Six Core Intel 3500/3600 Series Processors
9.

Rear I/O: 6 USB 2.0, PS/2 keyboard/mouse
1 RJ-45 to Integrated Gigabit LAN
1 Audio Line In, 1 Audio Line Out, 1 Microphone In
10.

2 PCIe x16 Gen2 Slots
11.

1 PCIe x4 Gen2, 1 PCIe x4 Gen1, 2 PCI Slots
12.

4 Internal USB 2.0 ports

Form Factor	Convertible Minitower
Operating Systems	<div>Preinstalled:<ul style="list-style-type: none">Genuine Windows® 7 Ultimate 64-Bit*Genuine Windows® 7 Professional 32-Bit*Genuine Windows® 7 Professional 64-Bit*HP Linux Installer Kit for Linux [includes drivers for 32-bit & 64-bit OS versions of Red Hat Enterprise Linux(RHEL) 4 Workstation, Red Hat Enterprise Linux (RHEL) 5 Workstation, Red Hat Enterprise Linux (RHEL) 6 Workstation, 64-bit SUSE Linux Enterprise Desktop (SLED) 11]SUSE Linux Enterprise Desktop 11 Linux preloadedRed Hat Enterprise Linux Desktop (Preinstall NOT available; 1 year paper license only)</div> <div>Supported:<ul style="list-style-type: none">Genuine Windows® 7 Enterprise 32/64Genuine Windows® XP Professional 32/64Genuine Windows® Vista Business 32/64</div> <div>Certified:<ul style="list-style-type: none">Solaris 10, 11</div>

Overview

	<ul style="list-style-type: none"> • Ubuntu 10.04, 11.04, 11.10 <p>* Systems may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See http://www.microsoft.com/windows/windows-7/ for details.</p> <p>Notes: For detailed OS/hardware support information for Linux, see: http://www.hp.com/support/linux_hardware_matrix</p>
Available Processors	Intel® Xeon® Processor W3503 2.40 GHz, 4MB cache, 1066 memory, 4.8GT/s QPI, Dual-Core Intel Xeon Processor W3505 2.53 GHz, 4MB cache, 1066 memory, 4.8GT/s QPI, Dual-Core Intel Xeon Processor W3520 2.66 GHz, 8MB cache, 1066 memory, 4.8 GT/s QPI, Quad-Core, HT, Turbo Intel Xeon Processor W3550 3.06 GHz, 8MB cache, 1066 memory, 4.8 GT/s QPI, Quad-Core, HT, Turbo Intel Xeon Processor W3565 3.20 GHz, 8MB cache, 1066 memory, 4.8 GT/s QPI, Quad-Core, HT, Turbo Intel Xeon Processor W3670 3.20 GHz, 12MB cache, 1066 memory, 4.8 GT/s QPI, Six-Core, HT, Turbo Intel Xeon Processor W3680 3.33 GHz, 12MB cache, 1333 memory, 6.4 GT/s QPI, Six-Core, HT, Turbo Intel Xeon Processor W3690 3.46 GHz, 12MB cache, 1333 memory, 6.4 GT/s QPI, Six-Core, HT, Turbo
Available Processor Disclaimers	<p>Intel's numbering is not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See: http://www.intel.com/products/processor_number/ for details.</p> <p>64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers and applications enabled for Intel 64 architecture. Processor will not operate (including 32-bit operation) without an Intel 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations.</p> <p>Dual-Core, Quad-Core and Six-Core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits. Check with software provider to determine suitability. Not all customers or software applications will necessarily benefit from use of these technologies.</p>
Chipset	Intel® X58 Express
Convertibility	Yes. 5.25" drives rotate for Minitower or Desktop orientation.
Expansion Slots (see system board section for more details)	<ul style="list-style-type: none"> • 2 PCI slots (full-height, full-length) • 1 PCI Express Gen1 slot x8 mechanical/x4 electrical • 1 PCI Express Gen2 slot x8 mechanical/x4 electrical • 2 PCI Express Gen2 slots x16 (one dedicated for graphics) <p>NOTE: The PCIe x8 connectors are open ended, allowing a PCIe x16 card to be seated in the slot.</p>
Expansion Bays (see storage section for more details)	<ul style="list-style-type: none"> • 2 internal 3.5" bays • 3 external 5.25" bays <p>NOTE: Third external 5.25" bay is not full depth; maximum depth 170 mm (6.7 inches)</p>
Memory	PC3-10600 DDR3-1333 ECC Unbuffered DIMMs
Front I/O	2 USB 2.0, 1 IEEE 1394a standard, 1 audio out, and 1 microphone.
Internal I/O	4 USB 2.0 ports available by two separate 2x5 headers: supports either up to two HP Internal USB Port Kits, AMO- EM165AA (one port on each Kit), or up to two USB Media Card Readers, or one Internal Port kit and one USB Media Card Reader.
Rear I/O	6 USB 2.0, 2 USB 3.0 (requires optional PCIe card), 1 optional serial port, 2 optional IEEE 1394a or 1394b ports (requires PCI card), 2 PS/2, RJ-45 (NIC), 1 audio line in, 1 audio line out, 1 microphone in; audio ports can be retasked to function as line in, line out, microphone, or headphone.
Interfaces Supported	22-in-1 Media Card Reader (optional)

Overview

Chassis Dimensions (HxWxD)	Standard minitower orientation: 45.02 x 16.79 x 45.53 cm (17.7 x 6.6 x 17.9 in) Converted desktop orientation: 45.02 x 16.79 x 45.53 cm (17.7 x 6.6 x 17.9 in)	
Weight	Exact weights depend upon configuration Minimum: 13.5 kg (29.8 lbs) Standard: 15.1 kg (33.2 lbs) Maximum: 19.6 kg (43.2 lbs)	
Temperature	Operating:	5° to 35°C (40° to 95°F)
	Non-operating	-40° to 60°C (-40° to 140°F)
Humidity	Operating:	8% to 85%
	Non-operating	8% to 90%
Maximum Altitude (non-pressurized)	Operating:	3,000 m; 10,000 feet
	Non-operating	9,100 m; 30,000 feet
Power Supply	<p>475 watts wide-ranging, active Power Factor Correction, 85% Efficient The Z400 475W power supply efficiency report can be found at this link: http://www.pluginloadsolutions.com/psu_reports/80PLUS_DELTA_DPS-475CB-1%20A_475W_Report.pdf (Optional) 600 watts wide-ranging, active Power Factor Correction, 80% Efficient</p> <p>This power supply option has been discontinued on Z400 as of June 30, 2012</p> <p>The Z400 600W power supply efficiency report can be found at this link: http://www.pluginloadsolutions.com/psu_reports/DELTA_DPS-650LB%20B_ECOS%202171_600W_Report.pdf</p>	
Color	Jack Black/Alloy metallic	
Tape Backup	<p>For a complete listing of compatible tape offerings, please visit: http://www.hp.com/products1/storage/compatibility/tapebackup/Workstations/index.html</p>	

Supported Components

Processors

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Quad/Six-Core Intel® Xeon® Processor 3500/3600 Series with Intel® 64 Architecture				
Intel Xeon W3503, 2.40GHz, 4MB cache, 1066 memory, 4.8GT/s QPI, Dual-Core	Y	N		
Intel Xeon W3505, 2.53GHz, 4MB cache, 1066 memory, 4.8GT/s QPI, Dual-Core	Y	N		
Intel Xeon W3520, 2.66GHz, 8MB cache, 1066 memory, 4.8GT/s QPI, Quad-Core, HT, Turbo	Y	N		
Intel Xeon W3550, 3.06GHz, 8MB cache, 1066 memory, 4.8GT/s QPI, Quad-Core, HT, Turbo	Y	N		
Intel Xeon W3565, 3.20GHz, 8MB cache, 1066 memory, 4.8GT/s QPI, Quad-Core, HT, Turbo	Y	N		
Intel Xeon W3670, 3.20GHz, 12MB cache, 1066 memory, 4.8GT/s QPI, Six-Core, HT, Turbo	Y	N		
Intel Xeon W3680, 3.33GHz, 12MB cache, 1333 memory, 6.4GT/s, Six-Core, HT, Turbo	Y	N		
Intel Xeon W3690, 3.46GHz, 12MB cache, 1333 memory, 6.4GT/s QPI, Six-Core, HT, Turbo	Y	N		
HP Liquid Cooling Option is available for all the above processors. Intel's numbering is not a measurement of higher performance.				

Monitors / Displays

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP DreamColor LP2480zx Professional Display	Y	Y	GV546A8	
HP ZR30w 30-inch S-IPS LCD Monitor	Y	Y	VM617A8	
HP ZR2740w 27-inch LED Backlit IPS Monitor	Y	Y	XW476A8	
HP ZR2440w 24-inch LED Backlit IPS Monitor	Y	Y	XW477A8	
HP ZR24w 24-inch S-IPS LCD Monitor	Y	Y	VM633A8	
HP LP2475w 24-inch Widescreen LCD Monitor	Y	Y	KD911A8	
HP ZR2240w 21.5-inch LED Backlit IPS Monitor	Y	Y	XW475A8	
HP ZR2040w 20-inch LED Backlit IPS Monitor	Y	Y	LM975A8	
Supported by all Operating Systems available from HP				

Screen Size Diagonally Measured

Supported Components

SAS Hard Drives

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations				
300GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	LU967AA	
450GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	LU968AA	
600GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	VM647AA	
HP 300GB SAS 10K SFF HDD	Y	Y	A2Z20AA	
HP 450GB SAS 10K SFF HDD	Y	Y	B0A48AA	
HP 600GB SAS 10K SFF HDD	Y	Y	A2Z21AA	

Sub-Section Description/Notes

NOTE: SAS controller add-in card required

Up to (4) 3.5-inch 15K rpm SAS drives: 300, 450, 600 GB; 2.4 TB max

Up to (2) 2.5-inch 10K rpm SAS drives: 300, 450, 600 GB; 1.2 TB max

Removable Boot Drive option

SATA Hard Drives

SATA (Serial ATA) Hard Drives for HP Workstations

250GB SATA 7200 rpm 3Gb/s 3.5" HDD	Y	Y	PY278AA	
500GB SATA 7200 rpm 3Gb/s 3.5" HDD	Y	Y	PV943A	
1TB SATA 7200 rpm 3.0Gb/s 3.5" HDD	Y	Y	GE262AA	
1.5TB SATA 7200 rpm 3Gb/s 3.5" HDD	Y	Y	VH997AA	
2.0TB SATA 7200 rpm 3Gb/s 3.5" HDD	Y	Y	WE464AA	
160GB SATA 10K rpm SFF in 3.5" Frame HDD	Y	Y	EW222AA	
300GB SATA 10K rpm SFF in 3.5" Frame HDD	Y	Y	FM802AA	
600GB SATA 10K rpm SFF in 3.5" Frame HDD	Y	Y	XP309AA	

Sub-Section Description/Notes

Up to (4) 3.5-inch 7200 rpm SATA drives: 250, 500 GB, 1.0, 1.5, 2.0 TB; 8.0 TB max

Up to (4) 2.5-inch 10K rpm SATA drives: 160, 300, 600 GB; 2.4 TB max

Removable Boot Drive option

SATA Solid State Drives

HP Solid State Drives for Workstations

HP 160GB SATA SSD	Y	Y	LZ704AA	
HP 300GB SATA SSD	Y	Y	LZ069AA	
HP 128GB SATA SSD	Y	Y	A3D25AA	Note 1
HP 256GB SATA SSD	Y	Y	A3D26AA	Note 1

NOTE 1: Only available as first drive (boot drive)

For hard drives, 1 GB = 1 billion bytes; TB = 1 trillion bytes. Actual formatted capacity is less.

Supported Components

Hard Drive Controllers

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated SATA 3.0 Gb/s Controller				
Integrated SATA 3.0 Gb/s Controller	Y	N		
Factory integrated RAID on motherboard for SATA drives				
RAID 0 Configuration - Striped Array	Y	N		Note 1
RAID 0 Data Configuration -- Boot/OS Drive + 2 Drive Striped Array	Y	N		Notes 1 and 2
RAID 1 Configuration - Mirrored Array	Y	N		Note 1
LSI 9212 4-Port SAS 6Gb/s RAID Card				
LSI 9212 4-Port SAS 6Gb/s RAID Card	Y	Y	XP310AA	Notes 2 and 3
LSI MegaRAID® SAS 8888ELP Host Bus Adapter (HBA)				
LSI 8888ELP 8-port SAS HW RAID Card	N	Y	GE258AA	
LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card and iBBU08 Battery Backup Unit				
LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card	N	Y	WE465AA	
Optional: LSI iBBU08 Battery Backup Unit for LSI 9260-8i	N	Y	LA783AA	

NOTE 1: All drives must be identical in size, speed, and type for RAID arrays. Specific user-configured hardware SAS RAID configurations are supported on Linux systems. Please visit: http://www.hp.com/support/linux_hardware_matrix for details.

NOTE 2: In RAID 0 Data Configuration, Boot/OS Drive must be SATA.

NOTE 3: Specific user-configured hardware SAS RAID configurations are supported on this Linux system. Please visit: http://www.hp.com/support/linux_hardware_matrix for details. SATA hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance and is a good alternative to hardware-based RAID. Please visit: <http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf> for RAID capabilities with Linux.

All RAID arrays must be less than 2 TB, except for SATA RAID 0 Data Arrays.

Supported Components

Graphics

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes	Supported # of cards	Mixed
Professional 2D						
NVIDIA Quadro NVS 295 256MB PCIe Graphics Card	Y	Y	FY943AA	Note 1	2	Yes
NVIDIA NVS 300 512MB Graphics	Y	Y	XP612AA	Note 2	2	Yes
NVIDIA Quadro NVS 450 512MB Graphics	Y	Y	FH519AA	Note 3	2	Yes
Entry 3D						
NVIDIA Quadro 400 512MB Graphics	Y	Y	LD542AA		2	No
NVIDIA Quadro 600 1GB Graphics	Y	Y	WS093AA		2	No
AMD FirePro V3900 1GB Graphics	Y	Y	A6R69AA		2	No
AMD FirePro V4900 1GB Graphics	Y	Y	A3J92AA		2	No
Mid-range 3D						
NVIDIA Quadro 2000 1GB Graphics	Y	Y	WS094AA		2	No
NVIDIA Quadro 2000D (Spec DVI only card)	N	Y	A9C88AA		2	No
AMD FirePro V5900 2GB Graphics	Y	Y	LS992AA		2	No
High End 3D						
AMD FirePro V7900 2GB Graphics	Y	Y	LS993AA		1	No
NVIDIA Quadro 4000 2GB Graphics	Y	Y	WS095AA		1	No
NVIDIA Quadro 5000 2.5GB Graphics	Y	Y	WS096AA		1	No

NOTE 1: If 1st graphics card is NVS 295, 2nd graphics card must be NVS 295

NOTE 2: If 1st graphics card is NVS 300, 2nd graphics card must be NVS 300

NOTE 3: If 1st graphics card is NVS 450, 2nd graphics card must be NVS 450, NVS 295, or NVS 300

Memory

CTO

Option Kit Part Number

Support Notes

PC3-10600 DDR3-1333 ECC Unbuffered DIMMs CTO

2GB (1x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 3GB (3x1GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 4GB (2x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 4GB (1x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 6GB (6x1GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 6GB (3x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 8GB (2x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 8GB (4x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 12GB (3x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 12GB (6x2GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 16GB (4x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU
 24GB (6x4GB) DDR3-1333 ECC Unbuffered RAM 1-CPU

Sub-Section Description/Notes

Supported Components

NOTE: DIMMs should be distributed across all three memory channels for optimal performance. Each processor supports up to 3 channels of DDR3 memory. To realize full performance at least 1 DIMM must be inserted into each channel.

The CPUs determine the speed at which the memory is clocked. If a 1066MHz capable CPU is used in the system, the maximum speed the memory will run at is 1066MHz regardless of the specified speed of the memory.

AMO

PC3-10600 DDR3-1333 ECC Unbuffered DIMMs AMO

1GB (1x1GB) DDR3-1333 ECC Unbuffered RAM	FX698AA
2GB (1x2GB) DDR3-1333 ECC Unbuffered RAM	FX699AA
4GB (1x4GB) DDR3-1333 ECC Unbuffered RAM	NL797AA

NOTE: Only unbuffered DDR3 DIMMs are supported.

Multimedia and Audio Devices

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Intel/Realtek HD ALC262 Audio	Y	N		
HP Thin USB Powered Speakers	Y	Y	KK912AA	
Creative X-Fi Titanium PCIe Audio Card	Y	Y	Y	Notes 1 and 2

NOTE 1: The SoundBlaster X-Fi Titanium audio card is supported on Windows 7 Professional 32-Bit and 64-Bit and Windows 7 Ultimate 64-bit.

NOTE 2: The SoundBlaster X-Fi Titanium audio card is supported on specific Linux operating systems. Please visit: http://www.hp.com/support/linux_hardware_matrix for details.

Optical and Removable Storage

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP 16X DVD-ROM SATA Drive (non Lightscribe)	Y	Y	AR629AA	Notes 1 and 2
HP 16X DVD+/-RW SuperMulti SATA Drive (non-Lightscribe)	Y	Y	QS208AA	Note 2
HP Blu-ray Writer	Y	Y	AR482AA	Note 3
HP 22-in-1 Media Card Reader Kit (Workstations)	Y	Y	NK361AA	

NOTE 1: Not supported as a 2nd drive option.

NOTE 2: Actual speeds may vary. Does not permit copying of commercially available DVD movies or other copyright protected materials. Intended for creation and storage of your original material and other lawful uses. Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

NOTE 3: As Blu-ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI

Supported Components

or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.

Controller Cards

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP FireWire/IEEE 1394a PCI Card	Y	Y	PA997A	
HP IEEE 1394b FireWire PCIe Card	Y	Y	NK653AA	
HP USB 3.0 2x2 Port SuperSpeed PCIe x1 Card	Y	Y	QT587AA	

Networking and Communications

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Broadcom 5764 PCIe LOM Controller	Y	N		
Broadcom NetXtreme Gigabit Ethernet Plus NIC (PCIe)	Y	Y	FS215AA	Note 1
Intel Gigabit CT Desktop NIC	N	Y	FH969AA	
HP NC360T PCI Express Dual Port Gigabit NIC	N	Y	KU004AA	

NOTE 1: This is a PCI Express card based on the Broadcom 5761 chip.

"Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

The Broadcom (5761) NetXtreme Gigabit Ethernet Plus NIC and the Intel Gigabit CT NIC are supported on the following Linux operating systems:

Red Hat Enterprise Linux(RHEL) WS4, 5 Desktop/Workstation

Novell SLED 10 & 11

Racking and Physical Security

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Security Cable with Kensington Lock	N	Y	PC766A	
HP Solenoid Hood Lock & Hood Sensor	Y	N		
HP (CMT) Solenoid Lock	N	Y	DE618A	
HP xw4/Z4 Depth Adjustable Fixed Rail Rack Kit	N	Y	EK729AA	

Supported Components

Input Devices

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP PS/2 Standard Keyboard	Y	Y	DT527A	
HP USB Standard Keyboard	Y	Y	DT528A	
HP PS/2 Optical Scroll Mouse	Y	Y	EY703AA	
HP USB 2-Button Optical Scroll Mouse	Y	Y	DC172B	
HP USB Laser Mouse	Y	Y	GW405AA	
HP USB Optical 3-Button Mouse	Y	Y	DY651A	
HP USB Smart Card Keyboard	N	Y	ED707AA	
HP 2.4GHz Wireless Keyboard & Mouse	N	Y	NB896AA	
HP USB Optical 3-Button 2.9M OEM Mouse	N	Y	ET424AA	
HP SpaceExplorer 3D USB Controller	N	Y	RY429AA	
HP SpacePilot 3D USB Intelligent Controller	N	Y	EF390AA	

Other Hardware

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Configure minitower in desktop orientation	Y	N		
HP ENERGY STAR 5.0 Enabled Configuration	Y	N		
HP Workstation Mouse Pad	Y	N		Japan only
HP eSATA PCI Cable Kit	Y	Y	GM110AA	
HP Power Cord Kit	N	Y	DM293A	
HP Serial Port Adapter	Y	Y	PA716A	
HP Internal USB Port Kit	N	Y	EM165AA	
HP Optical Bay HDD Mounting Bracket	N	Y	NQ099AA	
HP Workstation to LTO SAS Int. Cable	N	Y	EH925A	
HP Z4 Fan and Front Card Guide Kit	Y	Y	VH190AA	
Autodesk AutoCAD Certification Label	Y	N		See Note 1

NOTE 1: Only available with the following graphics cards: NVIDIA Quadro 400, 600, 2000, 4000, and 5000 and AMD FirePro V3800, V4800, V5900, and V7900

Supported Components

Software

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Performance Advisor	Y	N		
Roxio Easy Media Creator (DVD/Blu-ray Disc burner software)	Y	N		
Intervideo WinDVD (DVD player/burner software)	Y	N		
HP ProtectTools Security	Y	N		Note 1
PDF Complete - Corporate Edition	Y	N		
HP Power Assistant	Y	N		
Buy Office	Y	N		
HP Remote Graphics Software (RGS) V5	Y	N		Will be preloaded starting 12/1/11. Supports both 32 and 64 bit versions of Windows 7 Professional and Enterprise, Windows XP Professional and Enterprise, Windows Vista Business, Ultimate and Enterprise, and RHEL V6

NOTE 1: Must select as a Configure to Order Option. Delivered as a "Drop in the Box" CD

Operating Systems

	Support Notes
Genuine Windows® 7 Ultimate 64-bit	Note 1
Genuine Windows® 7 Professional 32-bit	Note 1
Genuine Windows® 7 Professional 64-bit	Note 1
HP Linux Installer Kit	Note 2
SUSE Linux Enterprise Desktop 11	Note 2
Red Hat Enterprise Linux (RHEL) Workstation - Paper License (1yr)	Note 3

NOTE 1: See <http://www.microsoft.com/windows/windows-7/> for support details.

NOTE 2: See: <http://www.hp.com/workstations/software/linux>

NOTE 3: This second OS must be ordered with the HPIKL as the first OS.

System Technical Specifications

	NOTE: Restricted Material Usage updated to match GSE.																																																																																																																																																																													
System Board																																																																																																																																																																														
System Board Form Factor	ATX 243.84 x 304.8 mm (9.6 x 12 inches)																																																																																																																																																																													
Processor Socket	Single LGA1366																																																																																																																																																																													
CPU Bus Speed	QPI: Up to 6.4GT/sec																																																																																																																																																																													
Chipset	Intel® X58 Express																																																																																																																																																																													
Super I/O Controller	SMSC SCH5327, Rev B																																																																																																																																																																													
Memory Expansion Slots	6 DDR3 memory slots																																																																																																																																																																													
Memory Type Supported	DDR3, UDIMM (Unbuffered), ECC																																																																																																																																																																													
Memory Modes	Channel Interleaved																																																																																																																																																																													
Memory Speed Supported	800MHz, 1066MHz, and 1333MHz DDR3																																																																																																																																																																													
Memory Protection	ECC available on data, parity on address and command																																																																																																																																																																													
<table><tr><th rowspan="2">Memory Size (GB)</th><th colspan="4">HP Z400 4-DIMM</th><th colspan="6">HP Z400 6-DIMM</th></tr><tr><th>DIMM1</th><th>DIMM2</th><th>DIMM3</th><th>DIMM4</th><th>DIMM1</th><th>DIMM2</th><th>DIMM3</th><th>DIMM4</th><th>DIMM5</th><th>DIMM6</th></tr><tr><td>1</td><td>1 GB</td><td></td><td></td><td></td><td>1 GB</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>1 GB</td><td>1 GB</td><td></td><td></td><td>1 GB</td><td>1 GB</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>1 GB</td><td>1 GB</td><td>1 GB</td><td></td><td>1 GB</td><td>1 GB</td><td>1 GB</td><td></td><td></td><td></td></tr><tr><td>4</td><td>1 GB</td><td>1 GB</td><td>1 GB</td><td>1 GB</td><td>1 GB</td><td>1 GB</td><td>1 GB</td><td>1 GB</td><td></td><td></td></tr><tr><td>4</td><td>2 GB</td><td>2 GB</td><td></td><td></td><td>2 GB</td><td>2 GB</td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td>2 GB</td><td>2 GB</td><td>2 GB</td><td></td><td>2 GB</td><td>2 GB</td><td>2 GB</td><td></td><td></td><td></td></tr><tr><td>8</td><td>2 GB</td><td>2 GB</td><td>2 GB</td><td>2 GB</td><td>2 GB</td><td>2 GB</td><td>2 GB</td><td>2 GB</td><td></td><td></td></tr><tr><td>8</td><td>4 GB</td><td>4 GB</td><td></td><td></td><td>4 GB</td><td>4 GB</td><td></td><td></td><td></td><td></td></tr><tr><td>12</td><td colspan="4">NA</td><td>2 GB</td><td>2 GB</td><td>2 GB</td><td>2 GB</td><td>2 GB</td><td>2 GB</td></tr><tr><td>12</td><td>4 GB</td><td>4 GB</td><td>2 GB</td><td>2 GB</td><td>4 GB</td><td>4 GB</td><td>2 GB</td><td>2 GB</td><td></td><td></td></tr><tr><td>12</td><td>4 GB</td><td>4 GB</td><td>4 GB</td><td></td><td>4 GB</td><td>4 GB</td><td>4 GB</td><td></td><td></td><td></td></tr><tr><td>16</td><td>4 GB</td><td>4 GB</td><td>4 GB</td><td>4 GB</td><td>4 GB</td><td>4 GB</td><td>4 GB</td><td>4 GB</td><td></td><td></td></tr><tr><td>24</td><td colspan="4">NA</td><td>4 GB</td><td>4 GB</td><td>4 GB</td><td>4 GB</td><td>4 GB</td><td>4 GB</td></tr></table>											Memory Size (GB)	HP Z400 4-DIMM				HP Z400 6-DIMM						DIMM1	DIMM2	DIMM3	DIMM4	DIMM1	DIMM2	DIMM3	DIMM4	DIMM5	DIMM6	1	1 GB				1 GB						2	1 GB	1 GB			1 GB	1 GB					3	1 GB	1 GB	1 GB		1 GB	1 GB	1 GB				4	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB			4	2 GB	2 GB			2 GB	2 GB					6	2 GB	2 GB	2 GB		2 GB	2 GB	2 GB				8	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB			8	4 GB	4 GB			4 GB	4 GB					12	NA				2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	12	4 GB	4 GB	2 GB	2 GB	4 GB	4 GB	2 GB	2 GB			12	4 GB	4 GB	4 GB		4 GB	4 GB	4 GB				16	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB			24	NA				4 GB	4 GB	4 GB	4 GB	4 GB	4 GB
Memory Size (GB)	HP Z400 4-DIMM				HP Z400 6-DIMM																																																																																																																																																																									
	DIMM1	DIMM2	DIMM3	DIMM4	DIMM1	DIMM2	DIMM3	DIMM4	DIMM5	DIMM6																																																																																																																																																																				
1	1 GB				1 GB																																																																																																																																																																									
2	1 GB	1 GB			1 GB	1 GB																																																																																																																																																																								
3	1 GB	1 GB	1 GB		1 GB	1 GB	1 GB																																																																																																																																																																							
4	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB	1 GB																																																																																																																																																																						
4	2 GB	2 GB			2 GB	2 GB																																																																																																																																																																								
6	2 GB	2 GB	2 GB		2 GB	2 GB	2 GB																																																																																																																																																																							
8	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB	2 GB																																																																																																																																																																						
8	4 GB	4 GB			4 GB	4 GB																																																																																																																																																																								
12	NA				2 GB	2 GB	2 GB	2 GB	2 GB	2 GB																																																																																																																																																																				
12	4 GB	4 GB	2 GB	2 GB	4 GB	4 GB	2 GB	2 GB																																																																																																																																																																						
12	4 GB	4 GB	4 GB		4 GB	4 GB	4 GB																																																																																																																																																																							
16	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB	4 GB																																																																																																																																																																						
24	NA				4 GB	4 GB	4 GB	4 GB	4 GB	4 GB																																																																																																																																																																				
Memory Configuration (Supported)	<ul style="list-style-type: none">• The 4GB DIMM for Z400 and Z600 is NOT compatible with the 4GB DIMMs offered on the Z800.• They are NOT interchangeable.• Only ECC DIMMs are supported.																																																																																																																																																																													
Note on Maximum Memory	*Maximum memory capacities assume 64-bit operating systems, such as genuine Windows® Vista Business 64, XP Professional x64 Edition, Red Hat Linux 64-bit. Genuine Windows Vista Business 32 and XP Professional (32-bit) support up to 4 GB. 32-bit Linux supports up to 8 GB.																																																																																																																																																																													

System Technical Specifications

PCI Express Connectors	2 x16 PCIe Gen2 1 x8 PCIe (x4)Gen2 1 x8 PCIe (x4) Gen1	
PCI Connectors (5.0V)	2 PCI	
Supported Drive Interfaces	SATA	Integrated 6-channel SATA 3.0Gb/sec controller with RAID 0, 1, 5, 10 and NCQ. (Factory integrated RAID is Microsoft Windows only)
	Serial Attached SCSI	Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit: http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf for RAID capabilities with Linux.
	Integrated RAID	NOTE: Requires identical hard drives (speeds, capacity, interface)
	Integrated Graphics	No
	Network Controller	Integrated HP Gbit LAN by Broadcom with the following management capabilities: WOL, PXE 2.1 and ASF 2.0
	External SATA (eSATA)	4 ports are eSATA configurable with optional eSATA After-Market Option cable kit.
	IDE connector	No
	Floppy connector	Yes
	Audio	High Definition Integrated Realtek ALC262 Audio with Line in, Line Out, Microphone, Headphone
	CD-ROM input (Audio)	No
	AUX INPUT (Audio)	Yes
IEEE 1394 Connector(s)	Front	6-DIMM Z400: 1 IEEE 1394a standard
	Rear	2 optional IEEE 1394a or IEEE 1394b, requires optional PCI card
	Internal	No
USB Connector(s)	Front	2 USB 2.0
	Rear	6 USB 2.0; 2 USB 3.0, requires optional PCIe card
	Internal	4 USB 2.0 ports available by two separate 2x5 headers: supports either up to two HP Internal USB Port Kits, AMO- EM165AA (one port on each Kit), or up to two USB Media Card Readers, or one Internal Port kit and one USB Media Card Reader.
HD Integrated Audio	High Definition Integrated Realtek ALC262 Audio with Line in, Line Out, Microphone, Headphone	
Flash ROM	Yes	
CPU Fan Header	Yes	
Chassis Fan Header	1 Rear System Chassis Fan Header, 1 Optional Front Chassis Fan Header	
Front PCI Fan Header	Yes	
Front Control Panel/Speaker Header	Yes	
CMOS Battery Holder - Lithium	Yes	

System Technical Specifications

Integrated Trusted Platform Module	Integrated TPM 1.2
Power Supply Headers	Yes
Power Switch, Power LED & Hard Drive LED Header	Yes
Clear Password Jumper	Yes
Serial Port	Single Port (Requires optional Serial Port Adapter)
Parallel Port	No
Keyboard/Mouse	USB or PS/2
Hood Lock Header	Yes
Hood Sensor Header	Yes

Z400 Required power supply info

Power Supply	475W Custom PSU - (Wide Ranging, Active PFC)		600W Custom PSU - (Wide Ranging, Active PFC)	
Operating Voltage Range	90 - 269 VAC		90 - 269 VAC	
Rated Voltage Range	100 - 127 VAC 200 - 240 VAC	118 VAC	100 - 127 VAC 200 - 240 VAC	118 VAC
Rated Line Frequency	50-60 Hz	400Hz	50-60 Hz	400Hz
Operating Line Frequency Range	47 - 66 Hz	393-407 Hz	47 - 66 Hz	393-407 Hz
Rated Input Current	10A @ 100-127 VAC 6A @ 200-240 VAC	10A @ 118 VAC	10A @ 100-127 VAC 6A @ 200-240 VAC	10A @ 118 VAC
Heat Dissipation (Configuration & software dependent)	Typical 954 btu/hr (240.3 kg-cal/hr) Max 1977 btu/hr (498.2 kg-cal/hr)		Typical 1536 btu/hr (387 kg-cal/hr) Max 2560 btu/hr (645 kg-cal/hr)	
Power Supply Fan	92x25 mm variable speed		92x25 mm variable speed	
ENERGY STAR Qualified (Configuration dependent)	YES		NO	
80 PLUS® Compliant	YES, 85%		YES, 80%	
FEMP Standby Power Compliant @115V (Wake-on LAN disabled) (<2W in S5 - Power Off)	YES		YES	
EuP Compliant @ 230V (<1 W in S5 - Power Off)	YES		YES	
Power Consumption in sleep mode (as defined by ENERGY STAR) - Suspend to RAM (S3) (Instantly Available PC) measured at 115V.	<6W		<6W	
Built-in Self Test LED	YES		YES	

System Technical Specifications

Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)	YES	YES
---	------------	------------

System Configuration

Example Configuration #1	Processor Info Memory Info Graphics Info Disks/Optical/Floppy PSU	1x Intel Xeon W3503 1x1GB DDR3 1333 (UDIMM) NVS295 1x160GB SATA / 1 Optical / 0 Floppy 475W 85%					
Energy Consumption		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	86.23 W		85.26 W		85.90 W	
	Windows Busy Typ (S0)	140.90 W		137.85 W		140.40 W	
	Windows Busy Max (S0)	153.20 W		152.96 W		155.00 W	
	Sleep (S3)	4.17 W	3.96 W	4.03 W	3.79 W	4.14 W	3.90W
	Off (S5)	1.25 W	1.14 W	1.51 W	1.35 W	1.23 W	1.12 W
	Zero Power Mode (EuP)	0.31 W		0.61 W		0.29W	
Heat Dissipation**		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	294.30 btu/hr		290.99 btu/hr		293.18 btu/hr	
	Windows Busy Typ (S0)	480.89 btu/hr		470.48 btu/hr		479.19 btu/hr	
	Windows Busy Max (S0)	522.87 btu/hr		522.05 btu/hr		529.02 btu/hr	
	Sleep (S3)	14.2 btu/hr	13.5 btu/hr	13.8 btu/hr	12.9 btu/hr	14.1 btu/hr	13.3 btu/hr
	Off (S5)	4.27 btu/hr	3.89 btu/hr	5.15 btu/hr	4.61 btu/hr	4.20 btu/hr	3.82 btu/hr
	Zero Power Mode (EuP)	1.04 btu/hr		2.06 btu/hr		0.98 btu/hr	
Example Configuration #2	Processor Info Memory Info Graphics Info Disks/Optical/Floppy PSU	1 x Intel Xeon W3570 4x4GB DDR3 1333MHz (UDIMM) 1xFX4800 4x450GB SAS / 1 Optical / 0 Floppy 475W 85%					
Energy Consumption		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	180.70 W		178.30 W		181.00 W	
	Windows Busy Typ (S0)	404.60 W		393.20 W		407.50 W	
	Windows Busy Max (S0)	482.80 W		469.10 W		488.60 W	
	Sleep (S3)	4.84 W	4.65 W	5.13 W	4.94 W	4.85 W	4.66 W
	Off (S5)	1.18 W	1.07 W	1.61 W	1.37 W	1.16 W	1.05W
	Zero Power Mode (EuP)	0.32 W		0.61 W		0.29 W	
Heat Dissipation**		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	616.73 btu/hr		608.54 btu/hr		617.75 btu/hr	
	Windows Busy Typ (S0)	1380.90 btu/hr		1341.99 btu/hr		1390.80 btu/hr	
	Windows Busy Max (S0)	1647.80 btu/hr		1601.04 btu/hr		1667.59 btu/hr	
	Sleep (S3)	16.5 btu/hr	15.9 btu/hr	17.5 btu/hr	16.9 btu/hr	16.6 btu/hr	15.9 btu/hr
	Off (S5)	4.03 btu/hr	3.65 btu/hr	5.49 btu/hr	4.68 btu/hr	3.96 btu/hr	3.58 btu/hr

System Technical Specifications

	Zero Power Mode (EuP)	1.08 btu/hr	2.06 btu/hr	0.98 btu/hr
Example Configuration #3	Processor Info Memory Info Graphics Info Disks/Optical/Floppy PSU	1 x Intel Xeon W3520 3x1GB DDR3 1333MHz (UDIMM) 1xFX1800 1x250GB SATA / 1 Optical / 0 Floppy 475W 85%		
Energy Consumption		115 VAC	230 VAC	100 VAC
		LAN Enabled LAN Disabled	LAN Enabled LAN Disabled	LAN Enabled LAN Disabled
	Windows Idle (S0)	96.70 W	95.10 W	97.71 W
	Windows Busy Typ (S0)	237.99 W	233.03 W	239.04 W
	Windows Busy Max (S0)	268.79 W	267.95 W	274.90 W
	Sleep (S3)	3.89 W 3.65 W	4.20 W 3.96 W	3.83 W 3.61 W
	Off (S5)	1.20 W 1.06 W	1.51 W 1.35 W	1.17 W 1.02 W
	Zero Power Mode (EuP)	0.31 W	0.60 W	0.29 W
Heat Dissipation**		115 VAC	230 VAC	100 VAC
		LAN Enabled LAN Disabled	LAN Enabled LAN Disabled	LAN Enabled LAN Disabled
	Windows Idle (S0)	330.04 btu/hr	324.58 btu/hr	333.48 btu/hr
	Windows Busy Typ (S0)	812.26 btu/hr	795.33 btu/hr	815.84 btu/hr
	Windows Busy Max (S0)	917.38 btu/hr	914.51 btu/hr	938.23 btu/hr
	Sleep (S3)	13.3 btu/hr 12.5 btu/hr	14.3 btu/hr 13.5 btu/hr	13.1 btu/hr 12.3 btu/hr
	Off (S5)	4.10 btu/hr 3.60 btu/hr	5.15 btu/hr 4.61 btu/hr	3.99 btu/hr 3.48 btu/hr
	Zero Power Mode (EuP)	1.05 btu/hr	2.05 btu/hr	0.97 btu/hr

Example Configuration #4	Processor Info Memory Info Graphics Info Disks/Optical/Floppy PSU	1 x Intel Xeon W3680 6x2GB DDR3 1333MHz (UDIMM) 1xTesla C2050 2x500GB SATA / 1 Optical / 0 Floppy 600W 80%		
Energy Consumption		115 VAC	230 VAC	100 VAC
		LAN Enabled LAN Disabled	LAN Enabled LAN Disabled	LAN Enabled LAN Disabled
	Windows Idle (S0)	114.11 W	112.80 W	113.10 W
	Windows Busy Typ (S0)	411.11 W	403.4 W	409.50 W
	Windows Busy Max (S0)	460.0 W	460.40 W	458.10 W
	Sleep (S3)	3.67 W 3.41 W	4.12 W 3.85 W	3.64 W 3.41 W
	Off (S5)	1.19 W 1.05 W	1.61 W 1.47 W	1.15 W 1.01 W
	Zero Power Mode (EuP)	0.38 W	0.79 W	0.35W
Heat Dissipation**		115 VAC	230 VAC	100 VAC
		LAN Enabled LAN Disabled	LAN Enabled LAN Disabled	LAN Enabled LAN Disabled
	Windows Idle (S0)	389.46 btu/hr	384.99 btu/hr	386.01 btu/hr
	Windows Busy Typ (S0)	1403.12 btu/hr	1376.80 btu/hr	1397.62 btu/hr
	Windows Busy Max (S0)	1569.98 btu/hr	1571.35 btu/hr	1563.50 btu/hr
	Sleep (S3)	12.53 btu/hr 11.64 btu/hr	14.06 btu/hr 13.14 btu/hr	12.42 btu/hr 11.64 btu/hr
	Off (S5)	4.06 btu/hr 3.58 btu/hr	5.49 btu/hr 5.02 btu/hr	3.92 btu/hr 3.45btu/hr
	Zero Power Mode (EuP)	1.31 btu/hr	2.69 btu/hr	1.19 btu/hr

System Technical Specifications

Example Configuration #5 (ENERGY STAR Qualified)	Processor Info	1x Intel Xeon W3570					
	Memory Info	4x2GB DDR3 1333MHz (UDIMM)					
	Graphics Info	1 x FX4800					
	Disks/Optical/Floppy	2x1000GB SATA / 1 Optical / 0 Floppy					
	I/O	1xBroadcom 5761 Gigabit PCIe NIC					
	PSU	475W 85%					
Energy Consumption		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	On-Idle (ENERGY STAR® Idle (S0))	99.8 W		97.7 W		100.3 W	
	ENERGY STAR® PMAX Windows running Linpack and Viewperf	323.1 W		316.6 W		325.4 W	
	ENERGY STAR® "Sleep" (S3)	4.6 W	-	4.8 W	-	4.6 W	-
	ENERGY STAR® "Standby" (Off) (S5)	1.8 W	-	2.1 W	-	1.7 W	-
		115 VAC		230 VAC		100 VAC	
Heat Dissipation**		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	On-Idle (ENERGY STAR® Idle (S0))	340.6 btu/hr		333.5 btu/hr		342.3 btu/hr	
	ENERGY STAR® PMAX Windows running Linpack and Viewperf	1102.7 btu/hr		1080.6 btu/hr		1110.6 btu/hr	
	ENERGY STAR® "Sleep" (S3)	15.7 btu/hr	-	16.4 btu/hr	-	15.7 btu/hr	-
	ENERGY STAR® "Standby" (Off) (S5)	1.8 btu/hr	-	2.1 btu/hr	-	1.7 btu/hr	-
		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled

NOTES:

* Energy Star low energy mode

** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

Declared Noise Emissions (Entry-level and High-end configurations)

System Configuration (Entry level)	Processor Info	Intel Xeon Processor W3505 2.53 GHz
	Memory Info	4 x 1GB DDR3 1333 MHz
	Graphics Info	NVIDIA Quadro NVS 295
	Disks/Optical/Floppy	1 x 160 GB 7200 RPM SATA / DVD-ROM / No Floppy

System Technical Specifications

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure
	Idle	4.0 Bels	23 dB
	Hard drive Operating (random reads)	4.0 Bels	23 dB
	Floppy Drive Operating (continuous copy)		
	DVD-ROM Operating (sequential reads)	5.1 Bels	38 dB

System Configuration (High-end)	Processor Info	Intel Xeon Processor W3570 3.20 GHz
	Memory Info	4 x 1GB DDR3 1333 MHz
	Graphics Info	NVIDIA Quadro FX 4600
	Disks/Optical/Floppy	2 x 450 GB 15K SAS / DVD-ROM / No Floppy

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure
	Idle	4.7 Bels	37 dB
	Hard drive Operating (random reads)	5.1 Bels	38 dB
	Floppy Drive Operating (continuous copy)		
	DVD-ROM Operating (sequential reads)	5.3 Bels	38 dB

Environmental Requirements	Temperature	Operating: 5° to 35° C (40° to 95° F) Non-operating: -40° to 60° C (-40° to 140° F)
	Humidity	Operating: 8% to 85% RH, non-condensing Non-operating: 8% to 90% RH, non-condensing
	Maximum Altitude	Operating: 3,000 m (10,000 feet) Non-operating: 9,100 m (30,000 feet)
	Dynamic (new)	Shock Operating: ½-sine: 40g, 2-3ms Non-operating: ½-sine: 160 cm/s, 2-3ms (~100g) square: 422 cm/s, 20g NOTE: Values represent individual shock events and do not indicate repetitive shock events. Vibration Operating random: 0.5g (rms), 5-300 Hz Non-operating random: 2.0g (rms), 10-500 Hz NOTE: Values do not indicate continuous vibration.
	Cooling	Above 1524 m (5,000 ft) altitude, maximum operating temperature is de-rated by 1° C (1.8° F) per 305 m (1,000 ft) elevation increase

System Technical Specifications

Physical Security and Serviceability

Access Panel	Tool-less Includes system board and memory information
Optical Drive	Tool-less
Floppy Drive	Tool-less
Hard Drives	Tool-less
Expansion Cards	Tool-less
Processor Socket	Tool-less
Green User Touch Points	Yes, on tool-free internal chassis mechanisms
Color-coordinated Cables and Connectors	Yes
Memory	Tool-less
System Board	Tool-less
Dual Color Power and HD LED on Front of Computer	Yes
Configuration Record SW	Yes
Over-Temp Warning on Screen	Yes
Restore CD/DVD Set	Restores the computer to its original factory shipping image - Can be obtained via HP Support
Dual Function Front Power Switch	Yes, causes a fail-safe power off when held for 4 seconds
Padlock Support	Yes (optional): Locks side cover and secures chassis from theft 5.56 mm (0.2188 in) diameter padlock loop at rear of system
Cable Lock Support	Yes, Kensington Cable Lock (optional): Locks side cover and secures chassis from theft 3 mm x 7 mm slot at rear of system
Universal Chassis Clamp Lock Support	Yes (optional): Locks side cover and locks cables to chassis. Secures chassis from theft and allows multiple units to be chained together when used with optional cable Threaded feature at rear of system
Solenoid Lock and Hood Sensor	Yes (optional) The Solenoid Hood Lock eliminates the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The Sensor Kit detects when the access panel has been removed
Rear Port Control Cover	Yes, locks rear IO cables to prevent cable theft
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Yes, enables or disables serial, USB, audio, and network ports
Removable Media Write/Boot Control	Yes, prevents ability to boot from removable media on supported devices (and can disable writes to media)
Power-On Password	Yes, prevents an unauthorized person from booting up the workstation
Setup Password	Yes, prevents an unauthorized person from changing the workstation configuration

System Technical Specifications

3.3V Aux Power LED on System PCA	Yes
NIC LEDs (integrated) (Green & Amber)	Yes
CPUs and Heatsinks	A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less
Power Supply Diagnostic LED	Yes
Front Power Button	Yes, ACPI multi-function
Front Power LED	Yes, blue (normal), red (fault)
Front Hard Drive Activity LED	Yes, green
Front ODD Activity LED	Yes
Internal Speaker	Yes
System/Emergency ROM Flash Recovery	Recovers corrupted system BIOS.
Alert Standard Format (ASF) Specification	Version 2.0 support Industry-standard specification for network alerting in operating system-absent environments
Cooling Solutions	Air cooled forced convection, Optional processor liquid cooling solution
Power Supply Fans	92 mm x 92 mm x 25 mm 2-wire (non-serviceable)(475W) 92 mm x 92 mm x 25 mm 4-wire (non-serviceable)(600W)
CPU Heatsink Fan	Mainstream (<=95W): 80 mm x 80 mm x 15 mm 5-wire PWM Performance (>95W): 92 mm x 92 mm x 25 mm 5-wire PWM
MXM Heatsink Fan	92 mm x 92mm x 25 mm 4-wire PWM
Memory Heatsink Fan	No
HP Advanced System Diagnostics Offline Edition	<p>HP Vision Diagnostics Offline Edition</p> <p>The diagnostics utility must be booted from USB or CD, and enables you to perform testing and to view critical computer hardware and software configuration information from various sources.</p> <p>This utility enables you to:</p> <ul style="list-style-type: none"> • Run diagnostics • View the hardware configuration of the system <p>Key features and benefits</p> <p>HP Vision Diagnostics simplifies the process of effectively identifying, diagnosing, and isolating the hardware issues. In addition to robust management tools, service tools can be invaluable in quickly resolving system problems. To streamline the service process and resolve problems quickly, it is necessary to have the right information available at the time that a service call is placed. The primary information requirement, which is also the one that provides the greatest insight into potential system issues, is the configuration of the system. HP Vision Diagnostics helps provide higher system availability. Typical uses of Vision Diagnostics are:</p> <ul style="list-style-type: none"> • Testing and diagnosing apparent hardware failures

System Technical Specifications

	<ul style="list-style-type: none"> Documenting system configurations for upgrade planning, standardization, inventory tracking, disaster recovery, and maintenance Sending configuration information to another location for more in-depth analysis
Access Panel Key Lock	No
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI). <ul style="list-style-type: none"> Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system
Trusted Platform Module Chip with optional ProtectTools Software	Yes, Infineon SLB9635TT1.2
Integrated Chassis Handles	No
Power Supply	Requires T15 Torx or flat blade screwdriver
PCI Card Retention	Yes, rear (all), middle (none), front (full-length cards with extender)
Flash ROM	Yes
Diagnostic Power Switch LED on board	Yes
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder	Yes
DIMM Connectors	Yes
HP ProtectTools Security Manager	Yes - Not supported on Microsoft XP x64 or Linux

BIOS	
BIOS 32-bit Services	Standard BIOS 32-bit Service Directory Proposal v0.4
PCI 3.0 Support	Full BIOS support for PCI Express through industry standard interfaces.
ATAPI	ATAPI Removable Media Device BIOS Specification Version 1.0.
BBS	BIOS Boot Specification v1.01.
WMI Support	WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications.
BIOS Boot Spec 1.01+	Provides more control over how and from what devices the workstation will boot.
BIOS Power On	Users can define a specific date and time for the system to power on.
ROM Based Computer Setup Utility (F10)	Review and customize system configuration settings controlled by the BIOS.
System/Emergency ROM Flash Recovery with Video	Recovers system BIOS in corrupted Flash ROM.

System Technical Specifications

Replicated Setup	Saves BIOS settings to diskette or USB flash device in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering Computer Configuration Utility (F10 Setup).
SMBIOS	System Management BIOS 2.6, for system management information.
Boot Control	Disables the ability to boot from removable media on supported devices.
Memory Change Alert	Alerts management console if memory is removed or changed.
Thermal Alert	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> • NORMAL - normal temperature ranges. • ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown. • SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs.
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console.
ACPI (Advanced Configuration and Power Management Interface)	Allows the system to enter and resume from low power modes (sleep states). Enables an operating system to control system power consumption based on the dynamic workload. Makes it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. Supports ACPI 2.0 for full compatibility with 64-bit operating systems.
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen.
Remote Wakeup/Remote Shutdown	System administrators can power on, restart, and power off a client computer from a remote location.
Instantly Available PC (Suspend to RAM - ACPI sleep state S3)	Allows for very low power consumption with quick resume time.
Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system.
ROM revision levels	Reports the system BIOS revision level in Computer Configuration Utility (F10 Setup). Version is available through an industry standard interface (SMBIOS) so that management SW applications can use and report this information.
System board revision level	Allows management SW to read revision level of the system board. Revision level is digitally encoded into the HW and cannot be modified.
Start-up Diagnostics (Power-on Self-Test)	Assesses system health at boot time with selectable levels of testing.
Auto Setup when new hardware installed	System automatically detects addition of new hardware.
Keyboard-less Operation	The system can be booted without a keyboard.
Localized ROM Setup	Common BIOS image supports System Configuration Utility (F10 Setup) menus in 12 languages with local keyboard mappings.
Asset Tag	The user or MIS to set a unique tag string in non-volatile memory.
Per-slot Control	Allows I/O slot parameters (option ROM enable/disable, bus latency) to be configured individually.
Adaptive Cooling	Control parameters are set according to detected hardware configuration for optimal acoustics.

System Technical Specifications

Pre-boot Diagnostics	(Pre-video) critical errors are reported via beeps and blinks on the power LED.
Industry Standard Specification Support	
Industry Standard	Revision Supported by the BIOS
ACPI	Advanced Configuration and Power Management Interface, Version 2.0c
ASF	Alert Standard Format Specification, Version 2.0
ATA (IDE)	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
CD Boot	"El Torito" Bootable CD-ROM Format Specification Version 1.0
EDD	<ul style="list-style-type: none"> Enhanced Disk Drive Specification Version 1.1 BIOS Enhanced Disk Drive Specification Version 3.0
EHCI	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
PCI	PCI Local Bus Specification, Revision 2.3 PCI Power Management Specification, Revision 1.1 PCI Firmware Specification, Revision 3.0, Draft .7
PCI Express	PCI Express Base Specification, Revision 2.0
PMM	POST Memory Manager Specification, Version 1.01
SATA	<ul style="list-style-type: none"> Serial ATA Specification, Revision 1.0a Serial ATA 3 Gb/s: Extensions to Serial ATA 1.5 Gb/s, Revision 1.0
SPD	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
TPM	Trusted Computing Group TPM Specification Version 1.2
UHCI	Universal Host Controller Interface Design Guide, Revision 1.1
USB	Universal Serial Bus Revision 1.1 Specification Universal Serial Bus Revision 2.0 Specification Universal Serial Bus Revision 3.0 Specification
SMBIOS	System Management BIOS Reference Specification, Version 2.6

Social and Environmental Responsibility

Eco-Label Certifications & Declarations	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> ENERGY STAR® (energy-saving features available on selected configurations -Windows only) US Federal Energy Management Program (FEMP) EPEAT Gold® for all ENERGY STAR® configurations. For more details and a list of countries in which this product is registered, please visit the following link: http://www.epeat.net/ProductDisplay.aspx?return=search&action=view&search=true&productid=2478&ProductType=5&epeatcountryid=1 China Energy Conservation Program IT ECO declaration Japan PC Green label* <p>*This product conforms to the examination standards (2003 version) under JEITA's 'PC Green Label System.'</p>
Batteries	This product complies with ISO standards:

System Technical Specifications

	<ul style="list-style-type: none"> • EU Directive 91/ 157/ EEC • EU Directive 93/ 86/ EEC • EU Directive 98/ 101/ EEC <p>Batteries used in the product do not contain:</p> <ul style="list-style-type: none"> • Mercury greater than 5ppm by weight • Cadmium greater than 10ppm by weight • Lead greater than 40ppm by weight <p>Battery size: CR2032 (coin cell) Battery type: Lithium</p>
Restricted Material Usage	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):</p> <ul style="list-style-type: none"> • Asbestos • Batteries - Mercury • Batteries - Cadmium • Batteries - Lead (non-rechargeable) • Batteries - Non-rechargeable Alkaline and Carbon-Zinc Batteries • Batteries - Classification as "Not Restricted" for Transport • Brominated Flame Retardants (PBBs, PBDEs, including DecaBDE) • Brominated Flame Retardants (all BFRs in external case plastic parts) • Cadmium and its compounds • Certain Azo Colorants • Chlorinated Hydrocarbons • Chlorinated Paraffins • Formaldehyde • Formaldehyde - emissions • Hexavalent Chromium and its compounds in metallic applications • Hexavalent Chromium and its compounds in non-metallic applications • Lead and its compounds • Lead in paint • Lead in Polyvinyl Chloride (PVC) coating of external cables, wires and cords • Mercury and its compounds • Nickel on external surfaces • Ozone Depleting Substances (ODS) • Polycyclic Aromatic Hydrocarbons (PAH) • Perfluorooctane sulfonates (PFOS) in parts • Perfluorooctane sulfonates (PFOS) in preparations • Polychlorinated Biphenyls (PCBs) and Polychlorinated Terphenyls (PCTs) • Polychlorinated Naphthalenes • Polyvinyl Chloride (PVC) in external case plastic parts • Radioactive Substances • Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
End-of-Life Management and Recycling	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>This product is greater than 90% recyclable by weight when properly disposed of at end of life.</p>

System Technical Specifications

	This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
Hewlett-Packard Corporate Environmental Information	For more information about HP's commitment to the environment, please see the Global Citizenship Report: http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications: http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html
Additional Information	This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC. This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986). This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC. Plastic parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043. This product contains 0% recycled materials (by weight) This product is >90% recycle-able when properly disposed of at end of life.
Packaging	HP follows these guidelines to decrease the environmental impact of product packaging: <ul style="list-style-type: none"> • Eliminate the use of heavy metals such as lead, chromium, mercury, and cadmium in packaging materials. • Eliminate the use of ozone-depleting substances (ODS) in packaging materials. • Design packaging materials for ease of disassembly. • Maximize the use of post-consumer recycled content materials in packaging materials. • Use readily recyclable packaging materials such as paper and corrugated materials. • Reduce size and weight of packages to improve transportation fuel efficiency. • Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
Packaging Materials	
Internal	LDPE Foam: .366 kg
External	Cardboard carton and insert: 1.536 kg

Manageability	
Industry Standard Specifications	This product meets the following industry standard specifications for manageability functionality: <ul style="list-style-type: none"> • ASF 2.0 (via integrated Broadcom LAN)
Remote Manageability Software Solutions	The HP Z400 Workstation is supported on the following remote manageability software consoles: <ul style="list-style-type: none"> • LANDesk Management Suite (PSG recommended solution) • Microsoft System Center Configuration Manager • HP Client Automation Enterprise For questions or support for manageability needs, please visit: http://www.hp.com/go/easydeploy
System Software Manager	For questions or support for SSM, please visit: http://www.hp.com/go/ssm
Service, Support, and Warranty	On-site Warranty and Service (Note 1): Three-years, limited warranty and service offering delivers on-site, next business-day (Note 2) service for parts and labor and includes free telephone support (Note 3) 8am - 5pm. Global coverage (Note 2) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering. NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply.

System Technical Specifications

	<p>NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.</p> <p>NOTE 3: Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24x7 support service may not be available in some countries. HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: http://www.hp.com/go/lookuptool. Additional HP Care Pack Services information by product is available at: http://www.hp.com/hps/carepack. Service levels and response times for HP Care Packs may vary depending on your geographic location.</p>
Product Change Notification	<ul style="list-style-type: none"> • Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile. • PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition. • Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support.

Stable & Consistent Offerings

As part of its commitment to hardware, software, and solution innovation, HP is proud to introduce this breakthrough platform configuration stability to HP Workstation customers. HP Stable & Consistent Offerings are built on the foundation of a carefully chosen set of hardware and software designed and tested to work with all HP Z Workstation platforms through their end of life. These components and their corresponding HP Workstation platform compatibility are outlined in this section.

HP Stable & Consistent Offerings are available worldwide to all HP Workstation customers—no special programs, no additional cost—no kidding. Simply select your hardware and software components when you customize your HP Workstation and be assured that you'll be able to buy that same configuration throughout the lifecycle of the product.

Processors	Product #	Offering
	NF136AV	Intel Xeon W3520, 2.66GHz, 8MB cache, 1066 memory, 4.8GT/s QPI, Quad-Core, HT, Turbo
	VU898AV	Intel Xeon W3565, 3.20GHz, 8MB cache, 1066 memory, 4.8GT/s QPI, Quad-Core, HT, Turbo
	WH058AV	Intel Xeon W3680, 3.33GHz, 12MB cache, 1333 memory, 6.4GT/s QPI, Six-Core, HT, Turbo
Hard Drives	Product #	Offering
	FX638AV	HP 250GB SATA 7200 1st HDD
	FX648AV	HP 250GB SATA 7200 2nd HDD
	FX658AV	HP 250GB SATA 7200 3rd HDD
	FX640AV	HP 500GB SATA 7200 1st HDD
	FX650AV	HP 500GB SATA 7200 2nd HDD
	FX660AV	HP 500GB SATA 7200 3rd HDD
	XB107AV	HP 500GB SATA 7200 4th HDD
Graphics	Product #	Offering
	FZ347AV	NVIDIA Quadro NVS 295 256MB Graphics Card
	FZ356AV	NVIDIA Quadro NVS 295 256MB Graphics (2nd)
	WS070AV	NVIDIA Quadro 2000 1GB Graphics
	WS071AV	NVIDIA Quadro 2000 1GB Graphics (2nd)
Memory	Product #	Offering
	NL980AV	3GB (3x1GB) DDR3-1333 ECC Unbuffered RAM
	NL982AV	6GB (3x2GB) DDR3-1333 ECC Unbuffered RAM
	NL984AV	12GB (3x4GB) DDR3-1333 ECC Unbuffered RAM
Optical and Removable Storage	Product #	Offering
	FX681AV	HP 16X DVD+-RW SuperMulti SATA 1st Drive
	FX682AV	HP 16X DVD+-RW SuperMulti SATA 2nd Drive

Stable & Consistent Offerings

Input Devices**Product #****Offering**

FX677AV

HP USB Optical Scroll Mouse

FZ362AV

HP USB Standard Keyboard

Operating Systems**Product #****Offering**

VM432AV

Genuine Windows® 7 Professional 64-bit

Technical Specifications - Processors

Processors

Intel Xeon W3503, 2.40GHz, 4MB cache, 1066 memory, 4.8GT/s QPI, Dual-Core
Intel Xeon W3505, 2.53GHz, 4MB cache, 1066 memory, 4.8GT/s QPI, Dual-Core
Intel Xeon W3520, 2.66GHz, 8MB cache, 1066 memory, 4.8GT/s QPI, Quad-Core, HT, Turbo
Intel Xeon W3550, 3.06GHz, 8MB cache, 1066 memory, 4.8GT/s QPI, Quad-Core, HT, Turbo
Intel Xeon W3565, 3.20GHz, 8MB cache, 1066 memory, 4.8GT/s QPI, Quad-Core, HT, Turbo
Intel Xeon W3670, 3.20GHz, 12MB cache, 1066 memory, 4.8GT/s QPI, Six-Core, HT, Turbo
Intel Xeon W3680, 3.33GHz, 12MB cache, 1333 memory, 6.4GT/s QPI, Six-Core, HT, Turbo
Intel Xeon W3690, 3.46GHz, 12MB cache, 1333 memory, 6.4GT/s QPI, Six-Core, HT, Turbo

Introduction

Intel's latest-generation microarchitecture represents the next step in unprecedented processor performance and dynamic scalability. Designed from the ground up, Intel® Microarchitecture unleashes parallel processing performance technology providing an integrated memory controller and high-speed interconnect per independent processing core.

Performance and Features

Intel® Microarchitecture offers the latest in processor innovation, including:

- Dynamic scalability, managed cores, threads, cache, interfaces, and power for energy-efficient performance on demand
- Design and performance scalability for servers, workstations, notebooks and desktops with support for 2-8+ cores and up to 16+ threads with Intel® Hyper-Threading Technology (Intel® HT Technology), and scalable cache sizes, system interconnects, and integrated memory controllers
- Intel® Turbo Boost Technology delivers additional performance automatically when needed by taking advantage of the processor's power and thermal headroom. This enables increased performance of both multi-threaded and single-threaded workloads.
- Intel Hyper-Threading Technology brings high-performance applications into mainstream computing with 1-16+ threads optimized for a new generation multi-core processor architecture.
- Scalable shared memory of Intel® QuickPath technology features memory distributed to each processor with integrated memory controllers and high-speed point-to-point interconnects to unleash the performance of future versions of next-generation Intel® multi-core processors.
- Multi-level shared cache improves performance and efficiency by reducing latency to frequently used data.

Turbo Boost Technology

This technology, now built into Xeon 3500 Series Quad-Core and Xeon 3600 6-Core processors, will increase the speed of your processor on demand if the CPU is operating below power or thermal specifications:

- Benefit of Turbo Boost (how much the CPU speeds up) depends on number of active cores
- Likelihood of Turbo Boost operation increases when less cores are active and when dynamic power management is enabled

Technical Specifications - Monitors / Displays

HP DreamColor LP2480zx Professional Display	QuickSpecs URL Part Number	http://h18000.www1.hp.com/products/quickspecs/13081_div/13081_div.html GV546A8
HP ZR30w 30-inch S-IPS LCD Monitor	QuickSpecs URL Part Number	http://h18000.www1.hp.com/products/quickspecs/13635_div/13635_div.html VM617A8
HP ZR2740w 27-inch LED Backlit IPS Monitor	QuickSpecs URL Part Number	http://h18000.www1.hp.com/products/quickspecs/14144_div/14144_div.html XW476A8
HP ZR2440w 24-inch LED Backlit IPS Monitor	QuickSpecs URL Part Number	http://h18000.www1.hp.com/products/quickspecs/14145_div/14145_div.html XW477A8
HP ZR24w 24-inch S-IPS LCD Monitor	QuickSpecs URL Part Number	http://h18000.www1.hp.com/products/quickspecs/13557_div/13557_div.html VM633A8
HP LP2475w 24-inch Widescreen LCD Monitor	QuickSpecs URL Part Number	http://h18000.www1.hp.com/products/quickspecs/13134_div/13134_div.html KD911A8
HP ZR2240w 21.5-inch LED Backlit IPS Monitor	QuickSpecs URL Part Number	http://h18000.www1.hp.com/products/quickspecs/14143_div/14143_div.html XW475A8
HP ZR2040w 20-inch LED Backlit IPS Monitor	QuickSpecs URL Part Number	http://h18000.www1.hp.com/products/quickspecs/14142_div/14142_div.html LM975A8

Technical Specifications - Hard Drives

HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations

600GB SAS 15K rpm 6Gb/s 3.5" HDD

Capacity	600GB
Height	1 in; 2.54 cm
Width	Media Diameter 3.5 in; 8.9 cm
	Physical Size 4 in; 10.17 cm
Interface	SAS
Synchronous Transfer Rate (Maximum)	6.0 Gb/s
Buffer	16 MB
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.2 ms
	Average 3.4 ms
	Full Stroke 6.6 ms
Rotational Speed	15,000 rpm
Logical Blocks	1,172,123,568 - 512 byte blocks
Operating Temperature	50° to 95° F (10° to 35° C)

450GB SAS 15K rpm 6Gb/s 3.5" HDD

Capacity	450GB
Height	1 in; 2.54 cm
Width	Media Diameter 3.5 in; 8.9 cm
	Physical Size 4 in; 10.17 cm
Interface	SAS
Synchronous Transfer Rate (Maximum)	6Gb/s
Buffer	16MB
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.2 ms
	Average 3.4 ms
	Full Stroke 6.6 ms
Rotational Speed	15,000 rpm
Operating Temperature	50° to 95° F (10° to 35° C)

300GB SAS 15K rpm 6Gb/s 3.5" HDD

Capacity	300GB
Height	1 in; 2.54 cm
Width	Media Diameter 3.5 in; 8.9 cm
	Physical Size 4 in; 10.17 cm
Interface	SAS
Synchronous Transfer Rate (Maximum)	6Gb/s
Buffer	16MB

Technical Specifications - Hard Drives

	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.2 ms
		Average	3.4 ms
		Full Stroke	6.6 ms
	Rotational Speed	15,000 rpm	
	Operating Temperature	50° to 95° F (10° to 35° C)	
HP 300GB SAS 10K SFF HDD	Capacity	300GB	
	Height	0.6 in; 1.53 cm	
	Width	Media Diameter	2.5 in; 6.36 cm
		Physical Size	2.75 in; 6.99 cm
	Interface	SAS 6Gb/s	
	Synchronous Transfer Rate (Maximum)	Up to 600MB/s	
	Buffer	64MB	
	Cache	multi-segmentable cache buffer	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.4 ms (max)
		Average	3.6 ms
		Full Stroke	7.3 ms
	Rotational Speed	10,000 rpm	
	Logical Blocks	585,937,500	
	Operating Temperature	41° to 131° F (5° to 55° C)	
HP 450GB SAS 10K SFF HDD	Capacity	450GB	
	Height	0.6 in; 1.53 cm	
	Width	Media Diameter	2.5 in; 6.36 cm
		Physical Size	2.75 in; 6.99 cm
	Interface	SAS 6Gb/s	
	Synchronous Transfer Rate (Maximum)	Up to 600MB/s	
	Buffer	64MB	
	Cache	multi-segmentable cache buffer	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.4ms (max)
		Average	3.6ms
		Full Stroke	7.3ms
	Rotational Speed	10K	
	Operating Temperature	41° to 131° F (5° to 55° C)	
HP 600GB SAS 10K SFF	Capacity	600GB	

Technical Specifications - Hard Drives

HDD

Height	0.6 in; 1.53 cm
Width	Media Diameter 2.5 in; 6.36 cm
	Physical Size 2.75 in; 6.99 cm
Interface	SAS 6Gb/s
Synchronous Transfer Rate (Maximum)	Up to 600MB/s
Buffer	64MB
Cache	multi-segmentable cache buffer
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.4 ms (max)
	Average 3.6 ms
	Full Stroke 7.3 ms
Rotational Speed	10,000 rpm
Logical Blocks	1,172,123,568
Operating Temperature	41° to 131° F (5° to 55° C)

SATA (Serial ATA) Hard Drives for HP Workstations

600GB SATA 10K rpm SFF in 3.5" Frame HDD

Capacity	600GB
Height	1 in; 2.54 cm
Width	Media Diameter 2.5 in; 6.36 cm
	Physical Size 4 in; 10.17 cm
Interface	Serial ATA (3.0Gb/s)
Synchronous Transfer Rate (Maximum)	Up to 300MB/s
Buffer	32MB
Cache	Segmentable
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.4 ms (max)
	Average 3.6 ms
	Full Stroke 9.0 ms
Rotational Speed	10,000 rpm
Logical Blocks	1,172,123,568
Operating Temperature	41° to 131° F (5° to 55° C)

300GB SATA 10K rpm SFF in 3.5" Frame HDD

Capacity	300,069,052,416 bytes
Height	1 in; 2.54 cm
Width	Media Diameter 2.5 in; 6.36 cm
	Physical Size 4 in; 10.17 cm
Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled
Synchronous Transfer Rate (Maximum)	Up to 300 MB/s

Technical Specifications - Hard Drives

	Cache	16 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.7 ms (maximum)
		Average	4.4 ms
		Full Stroke	9.5 ms
	Rotational Speed	10,000 rpm	
	Logical Blocks	586,072,368	
	Operating Temperature	41° to 131° F (5° to 55° C)	
160GB SATA 10K rpm SFF in 3.5" Frame HDD	Capacity	160,041,885,696 bytes	
	Height	1 in; 2.5 cm	
	Width	Media Diameter	2.5 in; 6.36 cm
		Physical Size	4 in; 10.17 cm
	Interface	Serial ATA (1.5 Gb/s), Native Command Queuing enabled	
	Synchronous Transfer Rate (Maximum)	Up to 300 MB/s	
	Buffer	16 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.7 ms (maximum)
		Average	4.4 ms
		Full Stroke	9.5 ms
	Rotational Speed	10,000 rpm	
	Logical Blocks	312,581,808	
	Operating Temperature	41° to 131° F (5° to 55° C)	
2.0TB SATA 7200 rpm 3Gb/s 3.5" HDD	Capacity	2.0TB	
	Height	1 in; 2.54 cm	
	Width	Media Diameter	3.5 in; 8.9 cm
		Physical Size	4.0 in; 10.17 cm
	Interface	Serial ATA (3.0 Gb/s), Native Command Queuing Enabled	
	Synchronous Transfer Rate (Maximum)	Up to 300MB/s	
	Buffer	64MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.0 ms
		Average	10 ms
		Full Stroke	Not Specified
	Rotational Speed	7,200 rpm	
	Logical Blocks	3,907,029,168	
	Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications - Hard Drives

1.5TB SATA 7200 rpm 3Gb/s 3.5" HDD	Capacity	1.5TB	
	Height	1 in; 2.54 cm	
	Width		Media Diameter 3.5 in; 8.9 cm
			Physical Size 4.0 in; 10.17 cm
	Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
	Synchronous Transfer Rate (Maximum)	Up to 300MB/s	
	Buffer	32MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2 ms
		Average	11 ms
		Full Stroke	21 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	2,930,277,168	
	Operating Temperature	41° to 131° F (5° to 55° C)	
1TB SATA 7200 rpm 3.0Gb/s 3.5" HDD	Capacity	1,000,204,886,016 bytes	
	Height	1 in; 2.5 cm	
	Width		Media Diameter 3.5 in; 8.9 cm
			Physical Size 4 in; 10.17 cm
	Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
	Synchronous Transfer Rate (Maximum)	Up to 300 MB/s	
	Buffer	32 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2 ms
		Average	11 ms
		Full Stroke	21 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	1,953,525,168	
	Operating Temperature	41° to 131° F (5° to 55° C)	
500GB SATA 7200 rpm 3Gb/s 3.5" HDD	Capacity	500,107,862,016 bytes	
	Height	1 in; 2.5 cm	
	Width		Media Diameter 3.5 in; 8.9 cm
			Physical Size 4 in; 10.17 cm
	Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	

Technical Specifications - Hard Drives

250GB SATA 7200 rpm 3Gb/s 3.5" HDD

Synchronous Transfer Rate (Maximum)	300 MB/s	
Buffer	16 MB	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2 ms
	Average	11 ms
	Full Stroke	21 ms
Rotational Speed	7,200 rpm	
Logical Blocks	976,773,168	
Operating Temperature	41° to 131° F (5° to 55° C)	
Capacity	250,059,350,016 bytes	
Height	1 in; 2.54 cm	
Width	Media Diameter	3.5 in; 8.9 cm
	Physical Size	4.0 in; 10.17 cm
Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
Synchronous Transfer Rate (Maximum)	300 MB/s	
Buffer	8 MB	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2 ms
	Average	11 ms
	Full Stroke	21 ms
Rotational Speed	7,200 rpm	
Logical Blocks	488,397,168	
Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications - Hard Drives

HP Solid State Drives for Workstations

HP 160GB SATA SSD	Capacity	160GB	
	Width	Physical Size	2.5 in; 6.36 cm
	Interface	SATA 3Gb/s	
	Synchronous Transfer Rate (Maximum)	Up to 270MB/s (Sequential Read)	
	Operating Temperature	32° to 158° F (0° to 70° C)	
HP 300GB SATA SSD	Capacity	300GB	
	Width	Physical Size	2.5 in; 6.36 cm
	Interface	SATA 3Gb/s	
	Synchronous Transfer Rate (Maximum)	Up to 270MB/s (Sequential Read)	
	Operating Temperature	32° to 158° F (0° to 70° C)	
HP 128GB SATA 6Gb/s SSD	Capacity	128GB	
	Width	Physical Size	2.5 in; 6.36 cm
	Interface	SATA 6Gb/s	
	Synchronous Transfer Rate (Maximum)	Up to 500MB/s (Sequential Read)	
	Operating Temperature	32° to 158° F (0° to 70° C)	
HP 256GB SATA 6Gb/s SSD	Interface	SATA 6Gb/s	
	Synchronous Transfer Rate (Maximum)	Up to 500MB/s (Sequential Read)	
	Operating Temperature	32° to 158° F (0° to 70° C)	

Technical Specifications - Hard Drive Controllers

LSI 9212 4-Port SAS 6Gb/s RAID Card	PCI Bus	8-lane, 5GT/s PCI Express 2.0
	PCI Modes	Bus Master DMA
	RAID Levels	RAID 0, 1, 1E and 10
	PCI Data Burst Transfer Rate	Half Duplex, x4 PCIe 2000 MB/s Full Duplex, x8 PCIe 4000 MB/s
	SAS Bandwidth	Half Duplex Single lane - 600 MB/s Wide Port (2 lanes) - 1200 MB/s Wide Port (4 lanes) - 2400 MB/s Full Duplex Single SAS Lane - 1200 MB/s Wide Port (2 lanes) - 2400 MB/s Wide Port (4 lanes) - 4800 MB/s
	PCI Card Type	3.3V Add-in card
	PCI Voltage	12 V ± 10%
	PCI Power	13.5 Watts
	Bracket	Full height and Low-profile
	Certification Level	PCI-Express 2.0
	IO Bus	1x4 6Gb/s SAS ports
	SAS Processor	LSISAS2008
	Internal Connectors	Four x1 SATA
LSI MegaRAID® SAS 888ELP Host Bus Adapter (HBA)	External Connectors	None
	Maximum Number of SCSI Devices	256
	LED Indicators	Internal Activity/Fault per x4 port - Heartbeat

LSI MegaRAID® SAS 888ELP Host Bus Adapter (HBA)	PCI Bus	PCI-Express x8 lanes
	PCI Modes	Bus Master DMA
	RAID Levels	RAID 0, 1, and 5 RAID spans 10 and 50
	PCI Data Burst Transfer Rate	Up to 3Gb/s per port
	Full Duplex	Up to 1.5 GB/s
	PCI Voltage	+3.3V Add-in Card
	PCI Power	19.2 Watts Maximum
	Certification Level	PCI-Express 1.0a
	IO Bus	Eight 3Gb/s SAS/SATA ports
	Internal Connectors	Two SAS SFF8087 x4
	External Connectors	Two SAS SFF8088 x4
	Maximum Number of SCSI Devices	32

Technical Specifications - Hard Drive Controllers

LED Indicators

Connector LEDs indicate whether the internal or external connector is active for ports 0-3 and 4-7

**LSI MegaRAID® 9260-8i
SAS 6Gb/s ROC RAID Card
and iBBU08 Battery
Backup Unit**

PCI Bus

PCI-Express (Gen2) V2.0 x8 lanes

PCI Modes

Bus Master DMA

RAID Levels

RAID 0, 1, 5, and 6
RAID spans 10, 50 and 60

PCI Data Burst Transfer Rate

Up to 4GB/s

PCI Card Type

Low profile, single PCIe slot design with full height bracket.

The optional iBBU08 Battery Backup unit mounts on the controller card and the assembly remains within a single PCIe slot width.

PCI Voltage

+3.3V Add-in Card

PCI Power

12.5 Watts

Certification Level

PCI-Express 2.0

IO Bus

Eight 3 Gb/s and 6Gb/s compatible SAS/SATA ports

Internal Connectors

Two SAS SFF8087 x4

External Connectors

None

Maximum Number of SCSI Devices

32.
NOTE: HP Workstations do not support this many internal drives.

LED Indicators

Connector LEDs indicate whether the internal connector is active for ports 0-3 and 4-7

Technical Specifications - Graphics

NVIDIA Quadro NVS 295 256MB Graphics Card	Form Factor	2.731 inches (H) × 6.600 inches (L), Half-Height
	Graphics Controller	NVIDIA Quadro NVS 295 Graphics Board
	Bus Type	PCI Express x16, Generation 2.0
	Memory	256 MB GDDR3 SDRAM unified graphics memory
	Connectors	2 DisplayPort Comes with 2 DisplayPort to DVI-D Adapters (‘DisplayPort to VGA’ and ‘DisplayPort to DL DVI’ adapters available as an accessory)
	Maximum Resolution	Two DisplayPort outputs drive two digital displays up to 2560 × 1600
		NOTE: This card supports up to two displays
	Display Output	<ul style="list-style-type: none"> • Drives DisplayPort enabled digital displays at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking • Drives DVI enabled digital displays at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking (through DisplayPort to DVI-D (single link) cable)
	Supported Graphics APIs	OpenGL 3.0 DirectX 10.0
	Available Graphics Drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 (64-bit and 32-bit) * WS4 not supported on Z200 & Z200 SFF Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation (64-bit and 32-bit) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
	Power Consumption	<24 Watts

Technical Specifications - Graphics

NVIDIA NVS 300 512MB Graphics	Form Factor	2.7 inches (H) x 5.7 inches (L), Half-Height
	Graphics Controller	NVIDIA NVS 300 Graphics Board
	Bus Type	PCI Express x16, Generation 2.0
	Memory	512 MB GDDR3 SDRAM unified graphics memory
	Connectors	DMS-59 Includes DMS-59 to Dual DVI-I adapter DMS-59 to Dual DisplayPort adapter and DMS-59 to Dual VGA adapter available as an option DMS-59 to Dual DisplayPort adapter required for HP ZR30w Display
	Maximum Resolution	DVI: two digital displays up to 1920 x 1200 DisplayPort: two digital displays up to 2560 x 1600 VGA: two analog displays up to 1920 x 1080
	Image Quality Features	
	Display Output	This card support up to two displays: <ul style="list-style-type: none">• Drives DVI enabled digital displays at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking• Drives DisplayPort enabled digital displays at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking (through optional DMS-59 to DisplayPort adapter)• Drives VGA enabled analog displays at resolutions up to 1920 x 1080 (through optional DMS-59 to VGA adapter)
	Supported Graphics APIs	OpenGL 3.3 DirectX 10.1
	Available Graphics Drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html Novell SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
	Power Consumption	<18 Watts

Technical Specifications - Graphics

NVIDIA Quadro NVS 450 512MB Graphics	Form Factor	ATX Full Height, 1/2 length Passive cooling
	Bus Type	PCI Express x16, Generation 2.0
	Memory	512 MB GDDR3 (256MB per GPU)
	Connectors	Four DisplayPort; Four DisplayPort to DVI-D adapters included. (‘DisplayPort to VGA’ and ‘DisplayPort to Dual Link DVI’ adapters available as an accessory)
	Maximum Resolution	DisplayPort connectors support ultra-high-resolution panels (up to 2560 x 1600)
	Supported Graphics APIs	OpenGL 3.0 DirectX 10.0
	Available Graphics Drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Microsoft Windows Vista (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
		HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
		SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
	Power Consumption	<40 Watts

NVIDIA Quadro 400 512MB Graphics	Form Factor	Low Profile, 2.7 inches (H) x 5.6 inches (L)
	Graphics Controller	NVIDIA Quadro 400 Graphics Board
	Bus Type	PCI Express x 16, Generation 2.0
	Memory	512MB DDR3 SDRAM
	Connectors	One (1) Dual-link DVI-I One (1) DisplayPort 1.1 Includes one DisplayPort to DVI-D adapter
	Maximum Resolution	DisplayPort 1.1: 2560 x 1600 @ 60 Hz Dual Link DVI-I: 2560 x 1600 @ 60 Hz Analog: 2048 x1536 @ 85 Hz
	RAMDAC	Dual internal 400 MHz DACs
	Display Output	This card supports up to two displays
	Supported Graphics APIs	OpenGL 3.2 DirectX 10.1 Shader Model 4.1
	Available Graphics Drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit)

Technical Specifications - Graphics

Red Hat Enterprise Linux(RHEL) WS4 (64-bit and 32-bit)
Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

Novell SUSE Linux Enterprise drivers may also be obtained from:
<ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

Power Consumption

< 35 Watts

NVIDIA Quadro 600 1GB Graphics

Form Factor

2.731" H x 6.6" L
Single Slot
Small Form Factor

Graphics Controller

NVIDIA Quadro 600 Graphics Card

Bus Type

PCI Express 2.0 x16

Memory

1 GB GDDR3
128-bit

Connectors

1 DVI-I output, 1 DisplayPort output
One DP to DVI adapter included with card

DVI to VGA, DisplayPort to VGA and DisplayPort to DVI adapters available as accessories

Maximum Resolution

DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)

Shading Architecture

Shader Model 5.0

Supported Graphics APIs

OpenGL 4.1
DirectX 11

CUDA API support includes:

CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran

Available Graphics Drivers

Genuine Windows 7 Professional (64-bit and 32-bit)
Genuine Windows Vista Business (64-bit and 32-bit)
Microsoft Windows XP Professional (64-bit and 32-bit)
Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit)
Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

SUSE Linux Enterprise drivers may also be obtained from:
<ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

Power Consumption

40 Watts

Technical Specifications - Graphics

AMD FirePro V3900 1GB Graphics	Form Factor	Full height, half length (full-height bracket included)
	Graphics Controller	AMD FirePro™ V3900 professional graphics
	Bus Type	PCI Express® x16, Generation 2.1
	Memory	1GB DDR3 memory
	Connectors	1 DL DVI, 1 DP output One DP to DVI adapter included
	Maximum Resolution	2560x1600 per display (5120x1600 max. horizontal resolution)
	Display Output	1 DisplayPort® 1.2 1 Dual-link DVI
	Supported Graphics APIs	OpenCL™ 1.1, DirectX® 11 and OpenGL 4.2
	Available Graphics Drivers	Genuine Windows® 7 Professional (64-bit and 32-bit) Genuine Windows Vista® Business (64-bit and 32-bit) Microsoft® Windows XP® Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
	Power Consumption	HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html <50W
	Note	AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See www.amd.com/firepro for details.
AMD FirePro V4900 1GB Graphics	Form Factor	Full height (4.37 in) , half length (6.61 in)
	Graphics Controller	AMD FirePro™ V4900 Professional Graphics
	Bus Type	PCI Express™ x16, Generation 2.1
	Memory	1GB GDDR5
	Connectors	2 DisplayPort, 1 dual link DVI Output, One DP to DVI adapter included
	Maximum Resolution	Up to three digital displays at resolutions up to 2560 x 1600 @ 60Hz or up to three analog displays, one at resolutions up to 2048 x 1536 @ 85Hz, plus two resolutions up to 1920 x 1200 @ 60Hz (165 MHz dot clock) Note: This card supports up to three displays with Windows 7, Vista or Linux, and up to two displays on XP
	RAMDAC	
	Image Quality Features	Up to 3 independent outputs with ATI Eyefinity technology support (More information at: www.amd.com/us/products/technologies/eyefinity/). Full 30-bit display pipeline. Advanced video capabilities, including high fidelity gamma, color correction and scaling. Dedicated hardware (UVD2) for H.264, VC-1, and MPEG2 decode
		NOTE: The use of more than two displays on Linux requires support for xrandr

Technical Specifications - Graphics

Supported graphics APIs	<p>1.2 or greater in the X server.</p> <p>DirectX 11 and OpenGL 4.1.</p> <p>OpenCL 1.2</p> <p>DirectCompute 11</p>
Available graphics drivers	<p>Genuine Windows 7 Professional (64-bit and 32-bit)</p> <p>Genuine Windows Vista Business (64-bit and 32-bit)</p> <p>Microsoft Windows XP Professional (64-bit and 32-bit)</p> <p>Red Hat Enterprise Linux(RHEL)</p> <p>SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)</p> <p>HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html</p>
Power Consumption	<75W
Note	<p>AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See www.amd.com/firepro for details.</p>

NVIDIA Quadro 2000 1GB Graphics	Form Factor	<p>4.376" H x 7" L</p> <p>Single Slot</p>
	Graphics Controller	NVIDIA Quadro 2000 Graphics Card
	Bus Type	PCI Express 2.0 x16
	Memory	<p>1 GB GDDR5</p> <p>128-bit</p>
	Connectors	<p>1 DVI-I output, 2 DisplayPort outputs</p> <p>One DP to DVI adapter included with card</p> <p>DVI to VGA, DisplayPort to VGA and DisplayPort to DVI adapters available as accessories</p>
	Maximum Resolution	<p>Dual DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)</p> <p>Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)</p>
	Image Quality Features	<ul style="list-style-type: none"> • Up to 16K x16K texture and render processing • Transparent multisampling and super sampling • 16x angle independent anisotropic filtering • 128-bit floating point performance • 32-bit per-component floating point texture filtering and blending • Support for any combination of two connected displays • DisplayPort 1.1a, HDMI 1.3a, and HDCP support • NVIDIA® 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support • Full OpenGL quad buffered stereo support • Underscan/overscan compensation and hardware scaling • NVIDIA® nView® multi-display technology

Technical Specifications - Graphics

Shading Architecture	Shader Model 5.0
Supported Graphics APIs	OpenGL 4.1 DirectX 11
Available Graphics Drivers	<p>CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran</p> <p>Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html</p> <p>SUSE Linux Enterprise drivers may also be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com</p>
Power Consumption	62 Watts

NVIDIA Quadro 2000D (Spec DVI only card)

Form Factor	4.376" H x 7" L Single Slot
Graphics Controller	NVIDIA Quadro 2000D Graphics Card
Bus Type	PCI Express 2.0 x16
Memory	1 GB GDDR5 128-bit
Connectors	2 Dual Link DVI outputs
Maximum Resolution	Dual-link DVI output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
Image Quality Features	<ul style="list-style-type: none"> • Up to 16K x16K texture and render processing • Transparent multisampling and super sampling • 16x angle independent anisotropic filtering • 128-bit floating point performance • 32-bit per-component floating point texture filtering and blending • Support for any combination of two connected displays • Dual Link DVI, HDMI 1.3a, and HDCP support • NVIDIA® 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support • Full OpenGL quad buffered stereo support • Underscan/overscan compensation and hardware scaling • NVIDIA® nView® multi-display technology
Shading Architecture	Shader Model 5.0
Supported Graphics APIs	OpenGL 4.0 DirectX 11
Available Graphics	<p>CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran</p> <p>Genuine Windows 7 Professional (64-bit and 32-bit)</p>

Technical Specifications - Graphics

Drivers

Genuine Windows Vista Business (64-bit and 32-bit)
Microsoft Windows XP Professional (64-bit and 32-bit)
Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit)
Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

SUSE Linux Enterprise drivers may also be obtained from:
<ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

Power Consumption

62 Watts

AMD FirePro V5900 2GB Graphics

Form Factor

Full-height, full length, single slot

Graphics Controller

AMD FirePro™ V5900 Professional Graphics

Bus Type

PCI Express™ x16, Generation 2.1

Memory

2GB GDDR5

Connectors

2 x Display Port 1.2
1 x Dual-link DVI
One DP to DVI adapter included with card

Maximum Resolution

2560 x 1600

Display Output

Up to 3 simultaneous displays (using AMD Eyefinity with Windows 7 or Linux)

Shading Architecture

Shader Model 5.0

Supported Graphics APIs

DirectX 11 and OpenGL 4.1

Available Graphics Drivers

Genuine Windows 7 Professional (64-bit and 32-bit)
Genuine Windows Vista Business (64-bit and 32-bit)
Microsoft Windows XP Professional (64-bit and 32-bit)
Red Hat Enterprise Linux(RHEL)
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

Power Consumption

< 75W

Note

AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See www.amd.com/firepro for details.

Technical Specifications - Graphics

AMD FirePro V7900 2GB Graphics	Form Factor	Full height, full length, single slot
	Graphics Controller	AMD FirePro™ V7900 Professional Graphics
	Bus Type	PCI Express™ x16, Generation 2.1
	Memory	2GB GDDR5
	Connectors	4 x DisplayPort 1.2 Two DP to DVI adapters included with card
	Maximum Resolution	2560 x1600
	Display Output	Up to 4 simultaneous displays (using AMD Eyefinity with Windows 7 or Linux)
	Shading Architecture	Shader Model 5.0
	Supported Graphics APIs	DirectX 11 and OpenGL 4.1
	Available Graphics Drivers	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
Power Consumption		HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html < 150W
Note		AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See www.amd.com/firepro for details.

NVIDIA Quadro 4000 2GB Graphics	Form Factor	4.376" H x 9.50" L Single Slot
	Graphics Controller	NVIDIA Quadro 4000 Graphics Card
	Bus Type	PCI Express 2.0 x16
	Memory	2 GB GDDR5 256-bit
	Connectors	1 DVI-I output, 2 DisplayPort outputs; One DP to DVI adapter included with card
		DVI to VGA, DisplayPort to VGA and DisplayPort to DVI (single- link or dual-link) adapters available as accessories (Optional stereo bracket available from 3rd party)
	Maximum Resolution	Dual DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz) Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
	RAMDAC	400 MHz integrated RAMDAC
	Image Quality Features	<ul style="list-style-type: none"> Up to 16K x16K texture and render processing Transparent multisampling and super sampling

Technical Specifications - Graphics

- 16x angle independent anisotropic filtering
- 128-bit floating point performance
- 32-bit per-component floating point texture filtering and blending
- Support for any combination of two connected displays
- DisplayPort 1.1a, HDMI 1.3a, and HDCP support
- NVIDIA 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support
- Full OpenGL quad buffered stereo support
- Underscan/overscan compensation and hardware scaling
- NVIDIA nView® multi-display technology

Shading Architecture Shader Model 5.0

Supported Graphics APIs OpenGL 4.0
DirectX 11
CUDA API support includes:
CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran

Available Graphics Drivers Genuine Windows 7 Professional (64-bit and 32-bit)
Genuine Windows Vista Business (64-bit and 32-bit)
Microsoft Windows XP Professional (64-bit and 32-bit)
Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit)
Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

Novell SUSE Linux Enterprise drivers may also be obtained from: <ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

Power Consumption 142 Watts

NVIDIA Quadro 5000 2.5GB Graphics

Form Factor 4.376" H x 9.75" L
Dual Slot

Graphics Controller NVIDIA Quadro 5000 Graphics Card

Bus Type PCI Express 2.0 x16

Memory 2.5 GB GDDR5
320-bit

Connectors DVI-I (1), DP (2), Stereo (1)
One DP to DVI adapter included with card

DVI to VGA, DisplayPort to VGA and DisplayPort to DVI adapters available as accessories

Maximum Resolution Dual DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)

Image Quality Features

- Up to 16K x16K texture and render processing
- Transparent multisampling and super sampling
- 16x angle independent anisotropic filtering
- 128-bit floating point performance
- 32-bit per-component floating point texture filtering and blending

Technical Specifications - Graphics

- Support for any combination of two connected displays
- DisplayPort 1.1a, HDMI 1.3a, and HDCP support
- NVIDIA 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support
- Full OpenGL quad buffered stereo support
- Underscan/overscan compensation and hardware scaling
- NVIDIA nView® multi-display technology

Shading Architecture

Shader Model 5.0

Supported Graphics APIs

OpenGL 4.0

DirectX 11

CUDA API support includes:

CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran

Available Graphics Drivers

Genuine Windows 7 Professional (64-bit and 32-bit)

Genuine Windows Vista Business (64-bit and 32-bit)

Microsoft Windows XP Professional (64-bit and 32-bit)

Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit)

Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation

SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

Novell SUSE Linux Enterprise drivers may also be obtained from: <ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

Power Consumption

152 Watts

Technical Specifications - Multimedia and Audio Devices

HP Thin USB Powered Speakers	Frequency Response (-3dB, 24-bit/96kHz input)	F0 to 20kHz
	Dimensions	Speakers: 14.52 x 9.50 x 2.45 cm (5.72 x 3.74 x 0.96 in) per speaker
SoundBlaster (Creative Labs) X-Fi Titanium PCIe Audio Card	24-bit Analog-to-Digital conversion of analog inputs	96kHz sample rate
	24-bit Digital-to-Analog conversion of digital sources	96kHz to analog 7:1 speaker output
	24-bit Digital-to-Analog conversion of stereo digital sources	8, 11.025, 16, 22.05, 24, 32, 44.1, 48 and 96kHz
	16-bit to 24-bit recording sampling rates	16-bit/44.1kHz, 16-bit/48kHz, 24-bit/44.1kHz, 24-bit/48kHz and 24-bit/96kHz with direct monitoring
	Enhanced SoundFont support	Up to 24-bit resolution
	Signal-to-Noise Ratio (20kHz Low-pass filter, A-Weighted)	109dB
	Total Harmonic Distortion + Noise at 1kHz (20kHz Low-pass filter)	.004%
	Frequency Response (-3dB, 24-bit/96kHz input)	10Hz to 46kHz
	Frequency Response (-3dB, 24-bit/192kHz input)	10Hz to 46kHz
	Speaker and Headphone connections	Stereo to 7.1 (Line Out via three 3.5mm mini jacks)
	Flexijack	Line In/ Microphone In/Optical Out via shared 3.5mm mini jack
	Front Panel Header	Intel HD Audio Compatible (2x5 pin)
	Operating System	Windows 7 Professional 32-bit and 64-bit Microsoft Windows Vista Business 32-bit and 64-bit Microsoft® Windows® XP Professional SP2 Microsoft Windows XP Professional x64 Edition
	Minimum System Requirements	System RAM 512MB Operating System Windows Vista 32-bit and 64-bit version or Windows XP 32-bit or 64-bit version

Technical Specifications - Optical and Removable Storage

HP DVD-ROM Drive	Description	5.25-inch, half-height, tray-load
	Mounting Orientation	Either horizontal or vertical
	Interface Type	SATA/ATAPI
	Dimensions (WxHxD)	15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)
	Disc Capacity	DVD-ROM Single layer: Up to 4.7 GB Double layer: Up to 8.5 GB
	Access Times	DVD-ROM Single Layer < 140 ms (typical)
		CD-ROM Mode 1 < 125 ms (typical)
		Full Stroke DVD < 250 ms (seek)
		Full Stroke CD < 210 ms (seek)
	Power	Source SATA DC power receptacle
		DC Power Requirements 5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
		DC Current 5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
	Operating Environmental (all conditions non-condensing)	Temperature 41° to 122° F (5° to 50° C)
		Relative Humidity 10% to 90%
		Maximum Wet Bulb Temperature 86° F (30° C)
		Operating Systems Supported Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation, Removed reference to "Novell" because of acquisition and changed product reference to "SUSE Linux Enterprise Desktop 10 & 11", No driver is required for this device. Native support is provided by the operating system.

HP DVD+/-RW Drive	Description	5.25-inch, half-height, tray-load
	Mounting Orientation	Either horizontal or vertical
	Interface Type	SATA/ATAPI
	Dimensions (WxHxD)	15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)
	Disc Formats	DVD-RAM
		DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW

Technical Specifications - Optical and Removable Storage

	CD-R			
	CD-RW			
Disc Capacity	DVD-ROM	8.5 GB DL or 4.7 GB standard		
	Full Stroke DVD	< 250 ms (seek)		
	Full Stroke CD	< 210 ms (seek)		
Maximum Data Transfer Rates	CD ROM Read	CD-ROM, CD-R Up to 40X CD-RW Up to 32X		
	DVD ROM Read	DVD-RAM	Up to 12X	
		DVD+RW	Up to 8X	
		DVD-RW	Up to 8X	
		DVD+R DL	Up to 8X	
		DVD-R DL	Up to 8X	
		DVD-ROM	Up to 16X	
		DVD-ROM DL	Up to 8X	
		DVD+R	Up to 16X	
		DVD-R	Up to 16X	
	Power	Source	SATA DC power receptacle	
		DC Power Requirements	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p	
DC Current			5 VDC -1000 mA typical, 1600 mA maximum 12 VDC -600 mA typical, 1400 mA maximum	
Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)		
	Relative Humidity	10% to 90%		
	Maximum Wet Bulb Temperature	86° F (30° C)		
	Operating Systems Supported	Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation SUSE Linux Enterprise Desktop 10 & 11		
	Kit Contents	No driver is required for this device. Native support is provided by the operating system. HP SATA SuperMulti DVD Writer Drive, Roxio Easy Media Creator software, Intervideo WinDVD Software, installation guide, and DVD+R media.		

HP Blu-Ray Writer	Description	5.25-inch, half-height, tray-load
	Mounting Orientation	Either horizontal or vertical
	Interface Type	SATA

Technical Specifications - Optical and Removable Storage

Dimensions (WxHxD)	15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)		
Disc Formats	BD-ROM BD-R BD-RE DVD-RAM DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW		
Disc Capacity	DVD-ROM	8.5 GB DL or 4.7 GB standard	
	Blu-ray	50 GB DL or 25 GB standard	
	Full Stroke DVD	< 250 ms (seek)	
	Full Stroke CD	< 210 ms (seek)	
	Blu-ray	Blu-ray	
	Startup Time (Time to drive ready from tray loading)	BD-ROM (SL/DL)	25S / 28S
		BD-R (SL/DL)	25S / 28S
		BD-RE (SL/DL)	25S / 28S
		DVD-ROM (SL/DL)	18S / 18S
		DVD-R (SL/DL)	25S / 25S
		DVD-RW	25S
		DVD+R (SL/DL)	25S / 25S
		DVD+RW	25S
		DVD-RAM	45S
		CD-ROM	45S
Maximum Data Transfer Rates	CD ROM Read	CD-ROM	Up to 40X
		CD-R	Up to 40X
		CD-RW	Up to 40X
	DVD ROM Read	DVD-RAM	Up to 5X
		DVD+RW	Up to 10X
		DVD-RW	Up to 10X
		DVD+R DL	Up to 8X
		DVD-R DL	Up to 8X
		DVD-ROM	Up to 16X
		DVD-ROM DL	Up to 8X
		DVD+R	Up to 12X
		DVD-R	Up to 12X
	Blu-Ray	BD-ROM	Up to 6X
		BD-ROM DL	Up to 4.8X
		BD-R	Up to 6X

Technical Specifications - Optical and Removable Storage

Power		BD-R DL	Up to 4.8X	
		BD-R	Up to 6X	
		BD-RE SL/DL	Up to 4.8X	
	Source	SATA DC power receptacle		
	DC Power Requirements	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 10%-100 mV ripple p-p		
	DC Current	5 VDC -900 mA typical, 1200 mA maximum 12 VDC -1000 mA typical, 1600 mA maximum		
	Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)	
		Relative Humidity	15% to 80%	
Maximum Wet Bulb Temperature		86° F (30° C)		
Operating Systems Supported		Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation, SUSE Linux Enterprise Desktop 10 & 11		
		* No driver is required for this device. Native support is provided by the operating system.		
		** RHEL WS4 not supported on Z200/Z200SFF		
	Kit Contents	HP Blue Laser RW Drive, Roxio Easy Media Creator software, Intervideo WinDVD Software, installation guide.		
Disclaimer	As Blu-Ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-Ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.			

Technical Specifications - Optical and Removable Storage

HP 22-in-1 Media Card Reader	Description	The Media Card Reader device uses the same physical form factor and mounting as a Floppy Disk Drive. The device connects to a 2x5 two-channel USB header on the motherboard of the system. There is no USB controller card provided. Please see the Disc Formats section below for a list of flash memory card formats that are supported.
	Mounting Orientation	The Media Card Reader can be mounted in a dedicated Floppy Drive bay (if the chassis provides one) or in an appropriate Optical Bay adapter. It will operate in any orientation.
	Interface Type	USB 2.0 (one channel dedicated to the separate USB port; one channel dedicated to the flash memory card slots)
	Dimensions (WxHxD)	124.5 x 101.6 x 25.4 mm (4.9 x 4.0 x 1.0 in)
	Disc Formats	xD-Picture Micro SD Micro SDHC SD SDHC SDXC Mini SD Mini SDHC MultiMediaCard (MMC) Reduced Size MultiMediaCard (RS MMC) MultiMedia Card 4.2 (MMC Plus, including MMC Plus HC) Reduced Size MultiMedia Card 4.2 (MMC Mobile, including MMC Mobile HC) CompactFlash Card Type I CompactFlash Card Type II MicroDrive Memory Stick (MS) MagicGate Memory Stick (MG) MagicGate Memory Stick Duo Memory Stick Select Memory Stick Duo (MS Duo) Memory Stick PRO (MS PRO) Memory Stick PRO Duo (MS PRO Duo) Memory Stick PRO-HG Duo Two additional formats are usable with adapters (not supplied): MMC Micro Memory Stick Micro (M2)

Technical Specifications - Controller Cards

HP FireWire/IEEE 1394a PCI Card	Data Transfer Rate	Burst Data Rate up to 400 Mbps
	Device Interface Protocol	IEEE-1394a
	Devices Supported	IEEE-1394 compliant devices
	Bus Type	PCI card with brackets for low profile and full height PCI slots.
	Certification Level	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
	Ports	Two IEEE 1394 6-Pin Connector (Rear)
	Internal Connectors	One 10-Pin (9 Contacts) Custom Connector
	System Requirements	Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. No driver is required for this device. Native support is provided by the operating system. * Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor . For Windows Vista system requirements, visit: http://www.windowsvista.com/systemrequirements .
		Pentium II 266 or above 128-MB RAM 1-GB Hard Drive CD-ROM drive Built-in sound system Available PCI slot
	Temperature - Operating	50° to 131° F (10° to 55° C)
	Temperature - Storage	-22° to 140° F (-30° to 60° C)
	Relative Humidity - Operating	20% to 80%
	Operating Systems Supported	Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32* * Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor . For Windows Vista system requirements, visit: http://www.windowsvista.com/systemrequirements .

Technical Specifications - Controller Cards

HP IEEE 1394b FireWire PCIe Card	Data Transfer Rate	Supports up to 800 Mbps
	Devices Supported	IEEE-1394 compliant devices
	Bus Type	PCIe card full height PCIe slots
	Ports	Two IEEE-1394b bilingual 9-Pin Connector (Rear)
	Internal Connectors	One 10-Pin header Custom Connector
	System Requirements	Windows 7 Professional 32-bit and 64-bit, Microsoft® Windows® XP Professional, Windows XP Home, Windows Vista, SLED 11 and RHEL 6. Intel Pentium® G series or higher processor, 128-MB RAM, 1-GB Hard Drive, CD-ROM drive, built in sound system, Available PCIe slot.
	Temperature – Operating	50° to 131° F (10° to 55° C)
	Temperature – Storage	–22° to 140° F (–30° to 60° C)
	Relative Humidity – Operating	20% to 80%
	Compliances	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
	Operating Systems Supported	Windows 7 Professional 32-bit and 64-bit, Windows Vista® Business 32-bit and 64-bit, Windows® XP Professional, XP Professional 64-bit. Not supported on Linux.

HP USB 3.0 2x2 Port SuperSpeed PCIe x1 Card	Dimensions (HxD)	TBD
	Ports	2 External, 2 internal
	Operating Systems Supported	Microsoft Windows 7, Windows Vista*, Windows XP Professional (32-bit and 64-bit); Red Hat Enterprise Linux 6, SUSE Linux Enterprise Desktop 11 Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor . For Windows Vista system requirements, visit: http://www.windowsvista.com/systemrequirements .
	Kit Contents	I/O and Security Software and Documentation CD with software drivers and documentation, HP SuperSpeed USB 3.0 PCIe x1 card (with full-height expansion bracket attached), SATA to SATA split power extension cable, Low profile expansion bracket to replace the full-height expansion bracket required on some computer models and HP SuperSpeed USB 3.0 PCIe x1 Card Quick Setup.
	Regulatory Approvals and registrations	FCC 15B, CE EN55022+ EN55024, VCCI, CISPR 22 AS/NZS CISPR 22, LCIE CB service(ITE/AV) IEC 60950-1, Korea EMC, UL USB-IF
	Weight	0.21 lb (95.0 g)
	Warranty	The HP USB 3.0 2x2 Port Super Speed PCIe x1 Card has either a one-year limited warranty or the remainder of the warranty of the HP product in which it is installed. Technical support is available seven days a week, 24 hours a day, by phone, as well as online support forums. Certain restrictions and exclusions apply.

Technical Specifications - Networking and Communications

NOTE 1: "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

Integrated Broadcom 5764 PCIe LOM Controller	Connector	RJ45
	Data Rates Supported	10/100/1000BT
	Bus Architecture	PCIe X1
	Alerting	ASF 2.0

Broadcom (5761) NetXtreme Gigabit Ethernet Plus NIC	Connector	RJ-45
	Controller	Broadcom 5761 PCI-Express LAN Controller
	Memory	8 MB NVRAM serial Flash
	Data Rates Supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB, 802.3u, and 802.3x
	Bus Architecture	PCI-Express
	Data Path Width	Single Channel PCI-Express
	Data Transfer Mode	Bus Master DMA
	Hardware Certifications	FCC class B, Canada and US NRTL Mark, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia, UL listed (E212044), European Union Notice (CE 0682)
	Power Requirement	1.8W @ 3.3V
	Boot ROM Support	Yes
	Network Transfer Mode	Full-duplex Half-duplex (not available for the 1000BASE-T transceiver)
	Network Transfer Rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	Operating Temperature	32° to 131°F (0° to 55° C)
	Operating Humidity	131° F (55° C) with 5% to 95% non-condensing humidity
	Dimensions	7 cm x 10.5 cm (2.75 in x 4.13 in), low profile compatible
	Operating System Driver Support	Windows 7 Professional 32-bit and 64-bit, Windows Vista 32-bit SP1, Windows Vista x64 SP1, Windows XP 32 bit professional, Windows XP x64 Red Hat Enterprise Linux (RHEL) 5, 6; Novell SLED 10 & 11
	Management Capabilities	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Broadcom mgmt utility, ASF2.0, DASH 1.0 and DASH 1.1 profiles
	Kit Contents	Broadcom NetXtreme Gigabit Ethernet Plus NIC, Broadcom NetXtreme Gigabit Ethernet Plus NIC USB Cable Assembly, CD, drivers, quick install guide, product warranty statement

Technical Specifications - Networking and Communications

Intel Gigabit CT Desktop NIC	Connector	RJ-45
	Controller	Intel WG82574L Gigabit Ethernet Controller
	Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
	Data Rates Supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus Architecture	PCI-E 1.0a
	Data Path Width	X1, 250 MB/s, Bi-directional interface
	Data Transfer Mode	Bus-master DMA
	Hardware Certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	Power Requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
	Boot ROM Support	Yes
	Network Transfer Rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	Operating Temperature	32° to 131°F (0° to 55° C)
	Operating Humidity	85% at 131° F (55° C)
	Dimensions	12.1 x 5.7 x 2.0 cm (4.75 x 2.25 x 0.8 in)
	Operating System Driver Support	Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64, Windows Vista Business 32, Windows XP Professional, Windows XP x64. Red Hat Enterprise Linux 4 (RHEL4.8 or newer)*, Red Hat Enterprise Linux 5 (RHEL5.3 or newer), Red Hat Enterprise Linux 6, SUSE Linux Enterprise Desktop (SLED) 11
		RHEL 4 and 5, SLED 10, are not supported on the Z220 CMT/SFF
	Management Capabilities	WOL , PXE, DMI, WFM 2.0
	Kit Contents	Intel Gigabit CT Desktop NIC, low profile bracket, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

Technical Specifications - Networking and Communications

HP NC360T PCI Express Dual Port Gigabit NIC	Connector	Two RJ-45
	Controller	Intel 82571EB
	Memory	Integrated 96KB
	Data Rates Supported	10/100/1000 Mbps
	Compliance	802.3, 802.3u, 802.3x, 802.3ab, 802.3ad, 802.1p, 802.1Q
	Bus Architecture	PCI-E 1.0a
	Data Path Width	Four lane (x4) PCI Express compatible with x4, x8, and x16 PCI Express slots
	Data Transfer Mode	Bus-master DMA
	Hardware Certifications	FCC Class B, VCCI Class B, BSMI Class A, CISPR 22 Class B, EN 55022 Class B, EN55024-1, ICES-003 Class B, MIC Class B, ACA Class B, UL, Canada UL, EN60950
	Power Requirement	1280 mA @ 3.3V typical
	Boot ROM Support	Yes
	Network Transfer Rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	Operating Temperature	32° to 131°F (0° to 55° C)
	Operating Humidity	0% to 95% non-condensing
	Dimensions	12.95 x 6.8 cm (5.1 x 2.7 in)
	Operating System Driver Support	Windows Vista Business 64, Windows Vista Business 32, Windows XP Professional, Windows XP Professional x64 Edition. Red Hat Enterprise Linux(RHEL) WS4, 5, 6 Desktop/Workstation Novell SLED 10 & SLED 11
	Management Capabilities	WOL , PXE 2.1
	Kit Contents	HP NC360T PCI Express Dual Port Gigabit NIC, low profile bracket, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

© Copyright 2013 Hewlett-Packard Development Company, L.P.
The information contained herein is subject to change without notice.

All rights reserved. Microsoft, Windows, Windows Vista, and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, the Intel logo, Pentium, and Pentium Inside are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. Linux is a registered trademark of Linus Torvalds in the United States and other countries.

Warranty - year(s) Protected by HP Services, including a 3 years parts, 3 years labor, and 3 years onsite service (3/3/3) standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.